


WT-A0003-Q03

腔体滤波器

技术指标

Serial	Parameters	
1	Center Frequency	1300MHz
2	Center Frequency Insertion Loss	≤1.2dB (Normal Temperature)
3	3dB Bandwidth	13~15MHz (Normal Temperature)
4	Number of Stage	3
5	VSWR	≤1.4 @ 1298~1302MHz
6	Rejection	≥30dB @ DC~1270MHz
		≥30dB @ 1330~2000MHz
7	Power Handling	5 W
8	Environment Temperature	-40℃~+80℃
9	Surface Finish	Black Paint
10	Port Connectors	SMA-Female
11	Configuration	As Below

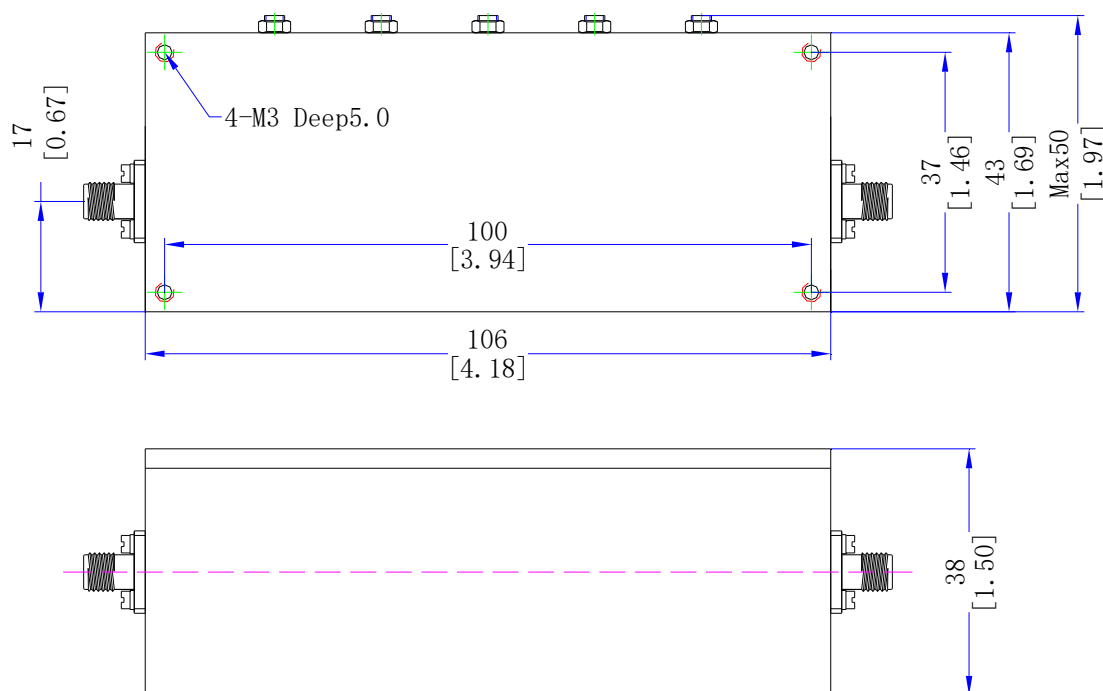

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市建设路 43 号 610051

Add:No.43,Jianshe Road,Chengdu.China Zip Code:610051