


WT-A0004-Q04

腔体滤波器

技术指标

Serial	Parameters	
1	Center Frequency	1300MHz
2	Center Frequency Insertion Loss	$\leq 1.4\text{dB}$ (Normal Temperature)
3	3dB Bandwidth	13~15MHz (Normal Temperature)
4	Number of Stage	4
5	VSWR	≤ 1.4 @ 1298~1302MHz
6	Rejection	$\geq 40\text{dB}$ @ DC~1270MHz
		$\geq 40\text{dB}$ @ 1330~2000MHz
7	Power Handling	5 W
8	Environment Temperature	-40°C ~ +80°C
9	Surface Finish	Black Paint
10	Port Connectors	SMA-Female
11	Configuration	As Below

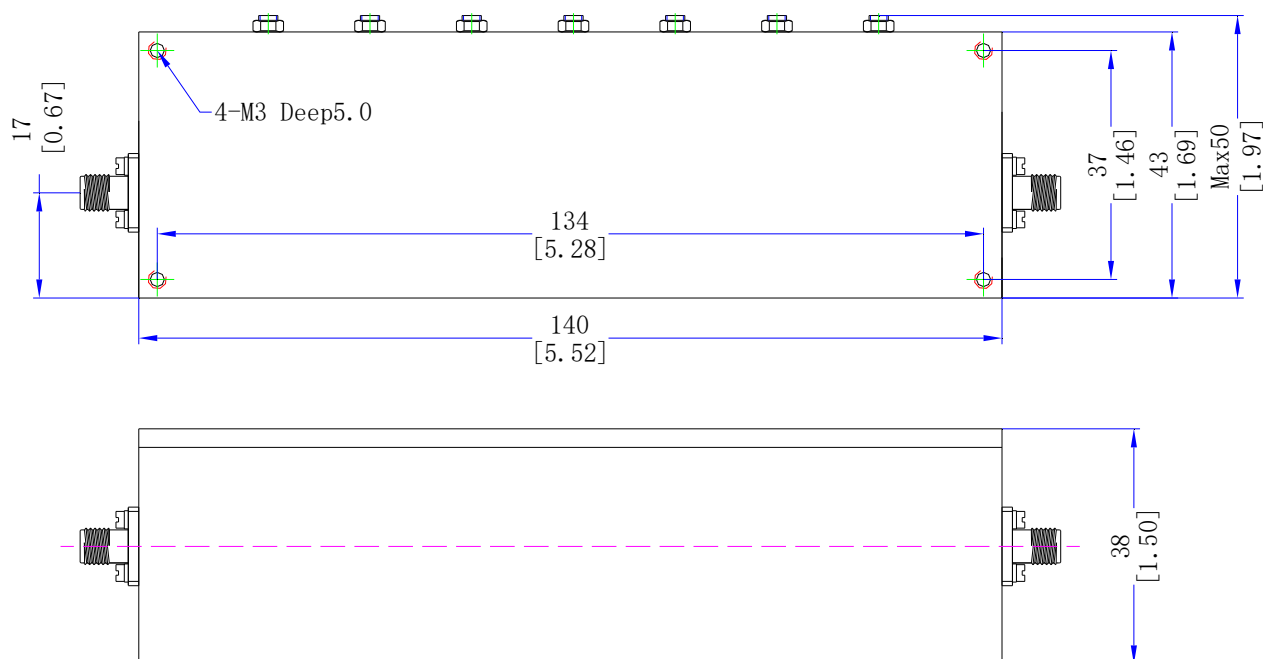

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市建设路 43 号 610051

Add:No.43,Jianshe Road,Chengdu.China Zip Code:610051