


# WT-A0038-HS

## High Pass Filter

### Specifications

Serial	Parameters	
1	Passband Frequency	1.5~4GHz
2	Insertion Loss	≤1.0dB
3	VSWR	≤1.7
4	Rejection	≥50dB @ 0.8~1GHz
5	Power Handling	3W
6	Temperature Range	10°C~+40°C
7	Surface Finish	Guide Oxygen or Black Paint
8	Port Connectors	SMA-Female
9	Net Weight	0.095 KG
10	Configuration	As Below

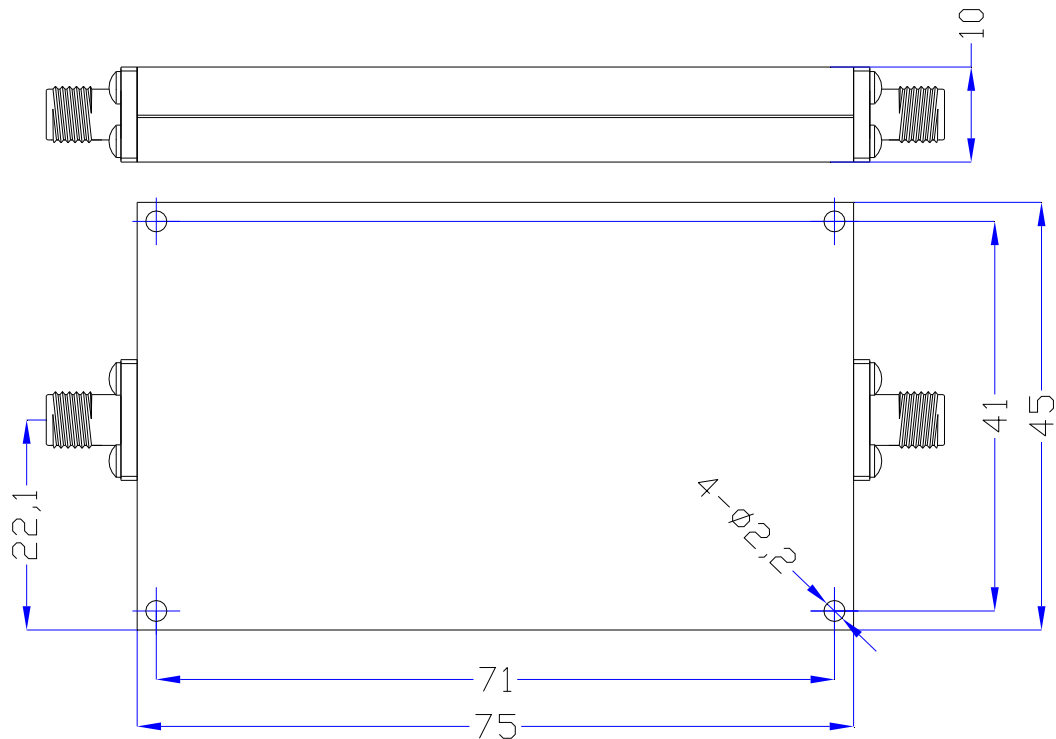

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: [tech@wtmicrowave.com](mailto:tech@wtmicrowave.com) [sales@wtmicrowave.com](mailto:sales@wtmicrowave.com)

<http://www.cdweitong.com> E-mail: [tech@cdweitong.com](mailto:tech@cdweitong.com) [sales@cdweitong.com](mailto:sales@cdweitong.com)

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051