


WT-A0080-S11

梳状滤波器

技术指标

Serial	Parameters	
1	Frequency Range	4000~4400MHz
2	Insertion Loss	$\leq 0.8\text{dB}$
3	VSWR	≤ 1.5
4	Rejection	$\geq 70\text{dB @ } 3450\text{MHz}$ $\geq 50\text{dB @ } 4500\text{MHz}$
5	Surface Finish	Black Paint
6	Operating Temperature	$-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
7	Port Connectors	SMA-Female
8	Configuration	As Below

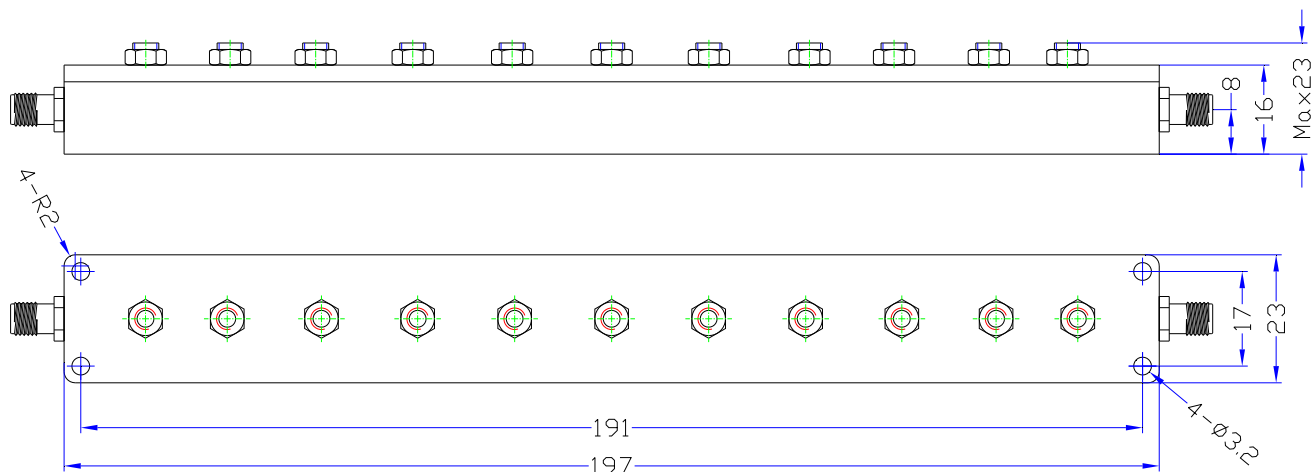

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市建设路 43 号 610051

Add:No.43,Jianshe Road,Chengdu.China Zip Code:610051

第4页 共4页