


## WT-A0158-Q06

### 腔体滤波器

### 技术指标

Serial	Parameters	
1	中心频率(Center Frequency)	2441.75MHz
2	1dB带宽(1dB Bandwidth)	$\pm 41.75\text{MHz}(2400\sim 2483.5\text{MHz})$
3	插入损耗(Insertion Loss)	$\leq 0.5\text{dB}@2441.75\text{MHz}$ $\leq 1.0\text{dB}@2400\sim 2483.5\text{MHz}$
4	驻波比(VSWR)	$\leq 1.5:1$
5	带外抑制(Rejection)	$\geq 40\text{dB}@ 2340\text{MHz}$ $\geq 40\text{dB}@ 2540\text{MHz}$
6	输入功率(Input Power)	1 W
7	温度范围(Temperature Range)	$-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
8	表面处理(Surface Finish)	黑色烤漆(Black Paint)
9	接口形式(Connectors)	SMA-Female
10	外形结构图(Configuration)	As Below

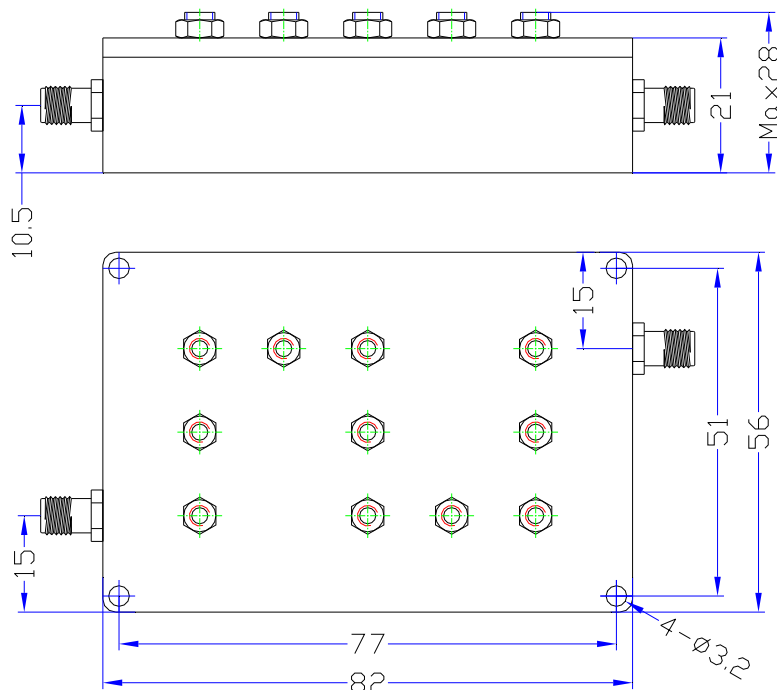

### 成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041