
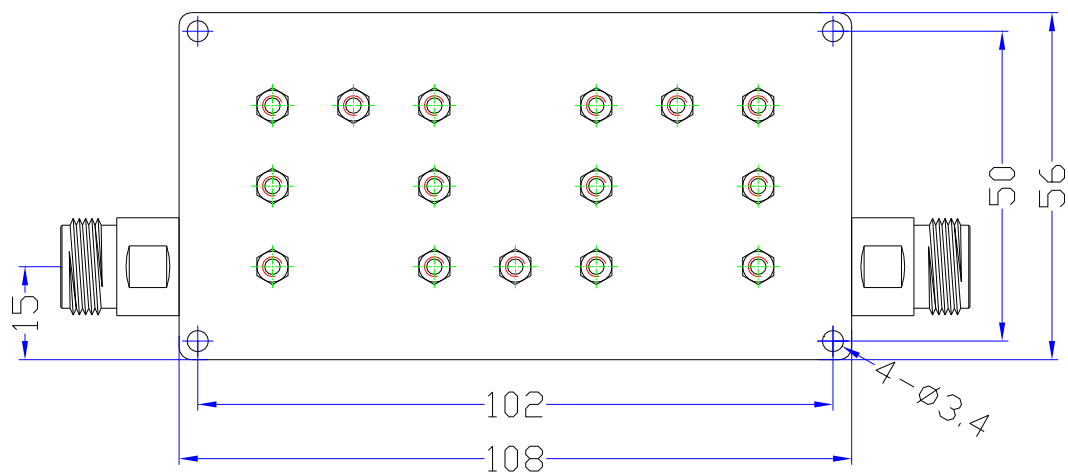


WT-A0104-Q08

腔体滤波器

技术指标

Serial	Parameters	
1	Frequency Range	2110~2170MHz, F0=2140MHz
2	Insertion Loss	≤1.0dB
3	Return Loss	≥15dB
4	Rejection	≥70dB@ 100~2060MHz ≥70dB@ 2220~4000MHz
5	Power Handling in Passband	50W Avg Max
6	Operating Temperature	0°C to 40°C
7	Surface Finish	Black Paint
8	Connectors	N-Female
9	Configuration	As Below

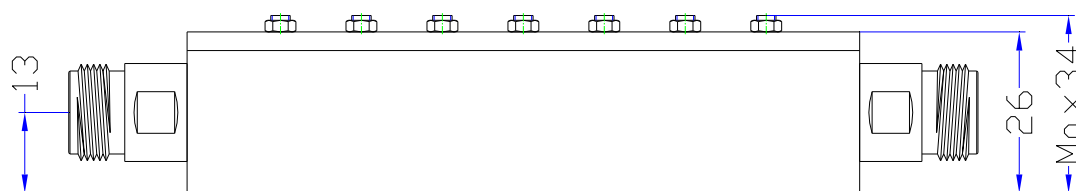

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市建设路 43 号 610051

Add:No.43,Jianshe Road,Chengdu.China Zip Code:610051