


# WT-A0188-J11

## 交指滤波器

### 技术指标

Serial	Parameters	
1	频率范围(Frequency Range)	422~558MHz, F0=490MHz
2	插入损耗(Insertion Loss)	$\leq 2.0\text{dB}$
3	带内波动(Ripple in Band)	$\leq 1.0\text{dB}$
4	驻波比(VSWR)	$\leq 1.5:1$
5	带外抑制(Rejection)	$\geq 25\text{dB}@ 396\text{MHz}$ $\geq 40\text{dB}@ 388\text{MHz}$ $\geq 25\text{dB}@ 578\text{MHz}$ $\geq 40\text{dB}@ 586\text{MHz}$
6	表面处理(Surface Finish)	黑色烤漆(Black Paint)
7	接口形式(Connectors)	N-Female
8	净重(Net Weight)	0.82 KG
9	外形结构图(Configuration)	As Below

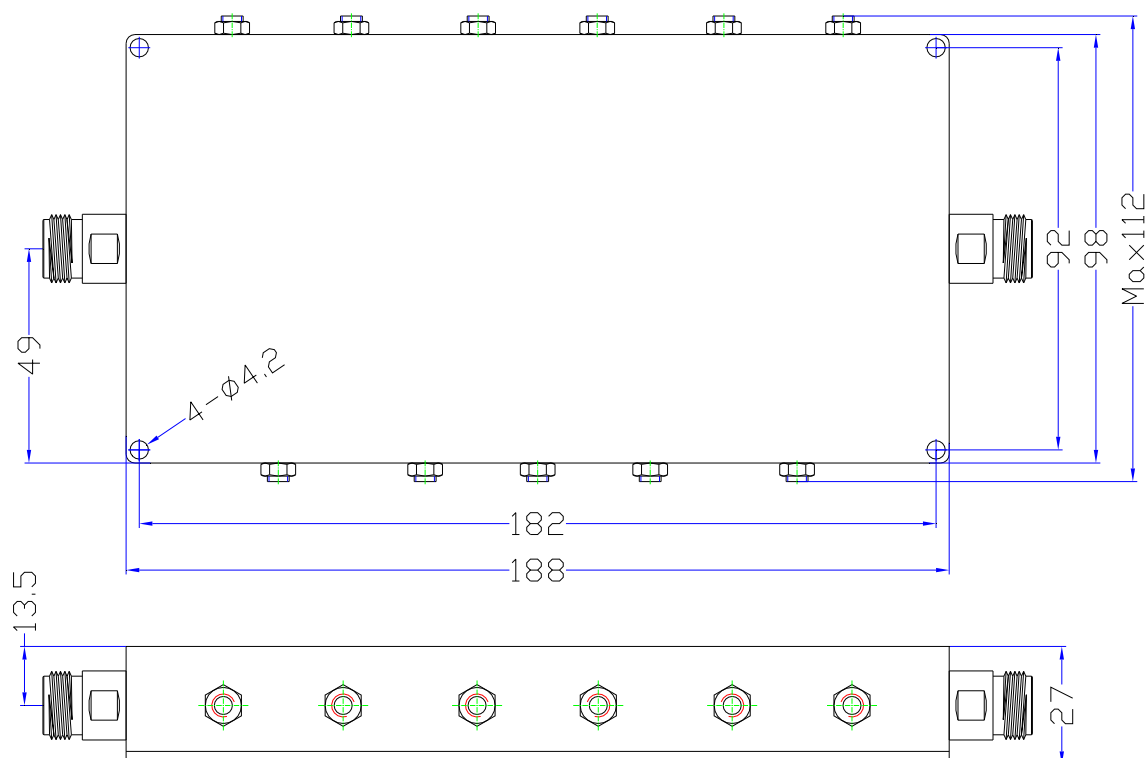

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市桂溪路 223 号 622041

Add:No.43,Guixi Road,Chengdu 622041,China Zip Code:622041