


## WT-A0601-S09

### Comb Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency(F0)	8.45GHz
2	Frequency Range	7.9~9GHz
3	Insertion Loss at F0	≤1.0dB
4	Ripple in Band	≤0.5dB
5	VSWR	≤1.3:1
6	Rejection	≥50dB@ 7.2GHz ≥35dB@ 9.35GHz
7	Impedance	50 ohms
8	Power Handling	≤10W
9	Connectors	∅ 0.5*2mm(Needle), SMA-Female (Removable)
10	Surface Finish	The Original Silver Color
11	Temperature Range	-40℃~+60℃
12	Net Weight	0.055 KG
13	Configuration	As Below (Size Unit: mm)

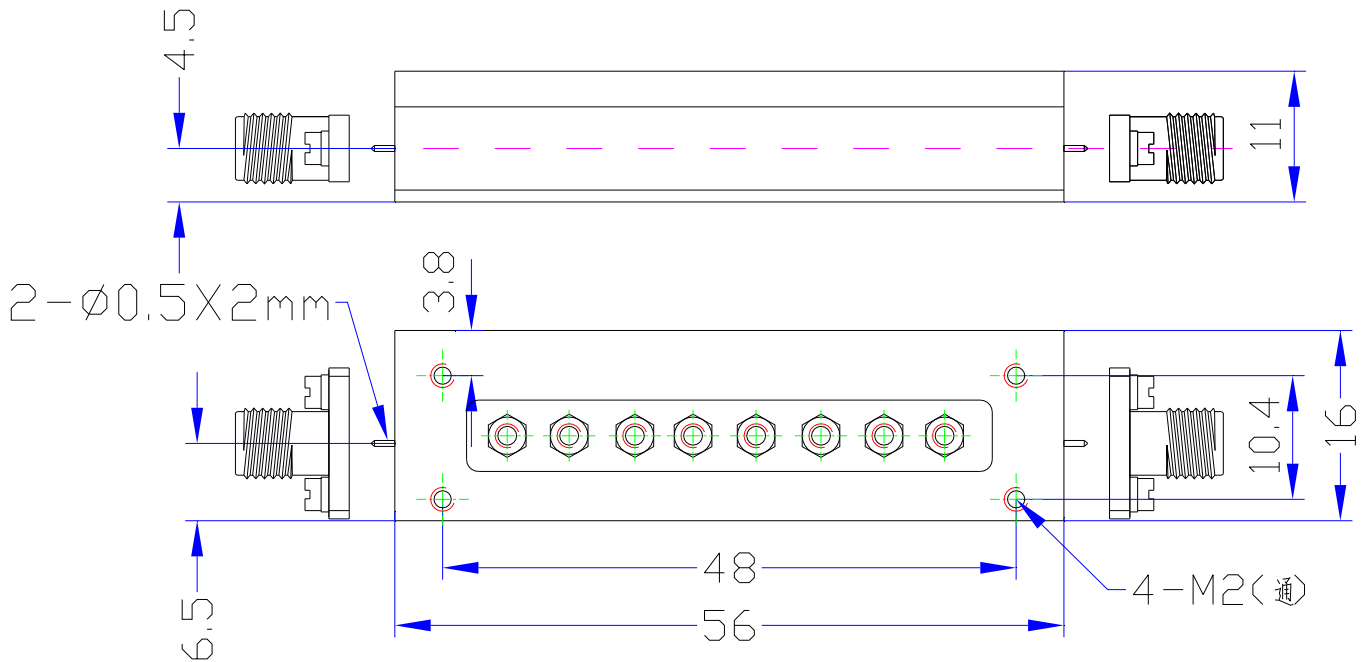

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051