


# WT-A0124-Q10

## 腔体滤波器

### 技术指标

| Serial | Parameters            |  |
|--------|-----------------------|--|
| 1      | Frequency Range       | 4600~4700MHz   |
| 2      | Insertion Loss        | $\leq 2.0\text{dB}$  |
| 3      | VSWR                  | $\leq 1.5$   |
| 4      | Rejection             | $\geq 55\text{dB}@ 4550\text{MHz}$<br>$\geq 55\text{dB}@ 4750\text{MHz}$ |
| 5      | Operating Temperature | $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$                           |
| 6      | Storage Temperature   | $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$                           |
| 7      | Surface Finish        | Black Paint  |
| 8      | Connectors            | SMA-Female   |
| 9      | Configuration         | As Below   |

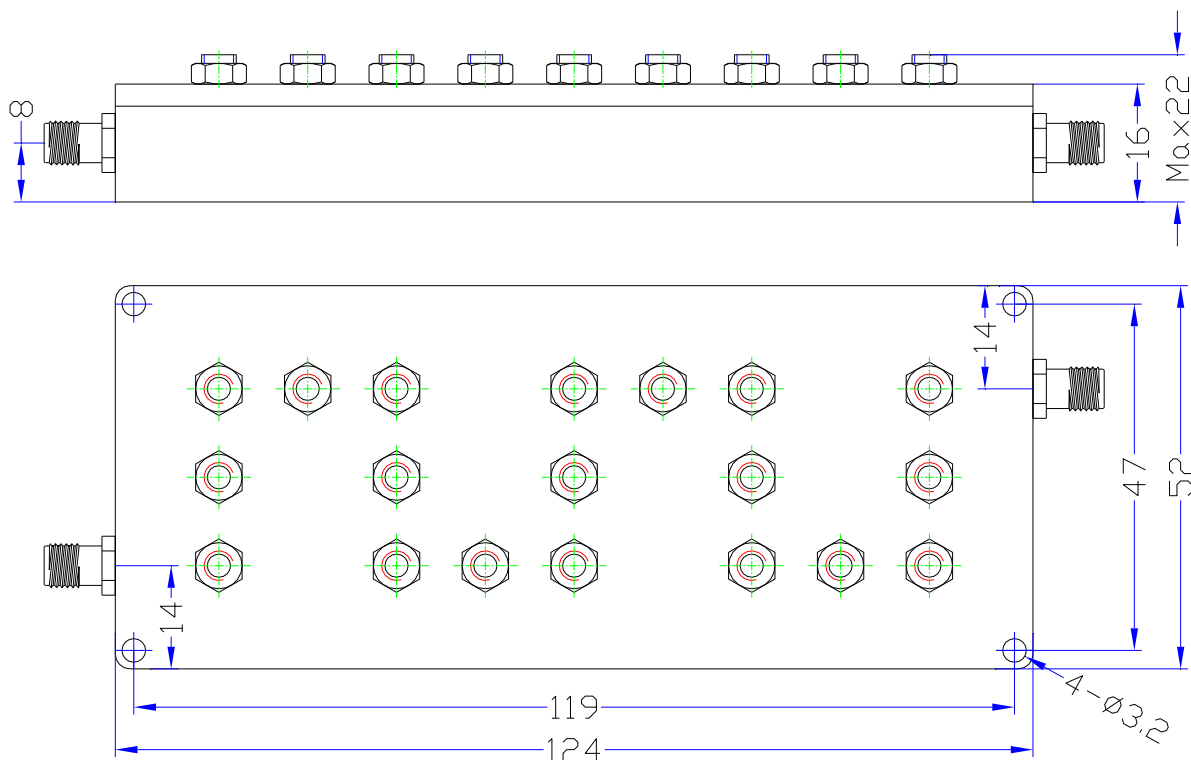

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市建设路 43 号 610051

Add:No.43,Jianshe Road,Chengdu.China Zip Code:610051