


## WT-A0126-HS

### 悬置基片带线高通滤波器

#### 技术指标

Serial	Parameters	
1	Passband Frequency	3000~13000MHz
2	Insertion Loss	$\leq 1.5\text{dB}$
3	VSWR	$\leq 2.0:1$
4	Rejection	$\geq 60\text{dB @ DC}\sim 2500\text{MHz}$
5	Power Handling in Passband	10W
6	Operating Temperature	$15^{\circ}\text{C}\sim +40^{\circ}\text{C}$
7	Surface Finish	Guide Oxygen or Black Paint
8	Port Connectors	SMA-Female
9	Net Weight	0.04 KG
10	Configuration	As Below

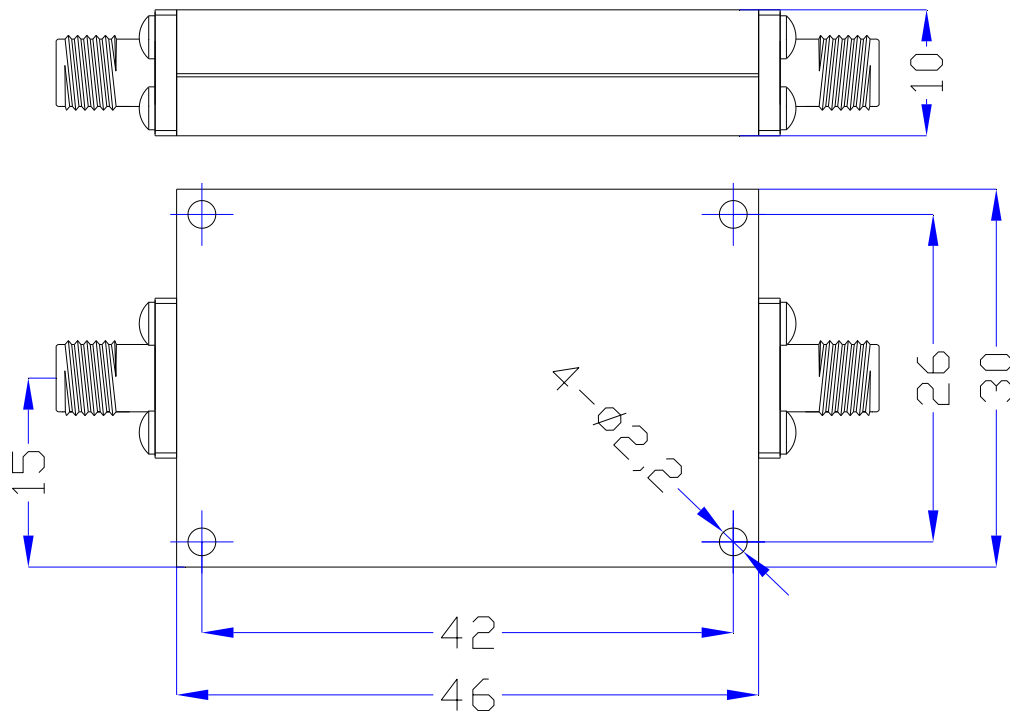

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041