


WT-A10367-Q05

Cavity Band Pass Filter

Technical Data Sheet

S/N	Item	Parameters						
1	Center Frequency(F0)	5800MHz						
2	Pass Band Frequency	5725 ~ 5875MHz **						
3	Pass Band Insertion Loss	≤0.65dB						
4	Pass Band Ripple	≤0.2dB						
5	Pass Band Return Loss	≥23dB						
6	Stop Band Rejection	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">≥80dB @ DC ~ 4600MHz</td> <td style="width: 50%;">≥55dB @ 6400 ~ 7000MHz</td> </tr> <tr> <td>≥55dB @ 4600 ~ 5200MHz</td> <td>≥80dB @ 7000 ~ 19000MHz</td> </tr> </table>	≥80dB @ DC ~ 4600MHz	≥55dB @ 6400 ~ 7000MHz	≥55dB @ 4600 ~ 5200MHz	≥80dB @ 7000 ~ 19000MHz		
≥80dB @ DC ~ 4600MHz	≥55dB @ 6400 ~ 7000MHz							
≥55dB @ 4600 ~ 5200MHz	≥80dB @ 7000 ~ 19000MHz							
7	Impedance	50 Ohms						
8	Power Handling	10W Max.						
9	Connectors	SMA-Female						
10	Surface Finish	Painted Black						
11	Temperature Range	-30°C ~ +70°C						
12	Material	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Housing: H62 Copper alloy</td> <td style="width: 50%;">Connectors: Stainless Steel</td> </tr> <tr> <td>Cover: H62 Copper alloy</td> <td>Other screw: Stainless Steel</td> </tr> <tr> <td colspan="2">Tuning screw: H62 Copper alloy</td> </tr> </table>	Housing: H62 Copper alloy	Connectors: Stainless Steel	Cover: H62 Copper alloy	Other screw: Stainless Steel	Tuning screw: H62 Copper alloy	
Housing: H62 Copper alloy	Connectors: Stainless Steel							
Cover: H62 Copper alloy	Other screw: Stainless Steel							
Tuning screw: H62 Copper alloy								
13	Dimensions	60*17*11mm						
14	Net weight	0.07 KG						

Outline Drawing: (Dimensions Unit: mm, Dimensions Tolerance: ±0.3mm)

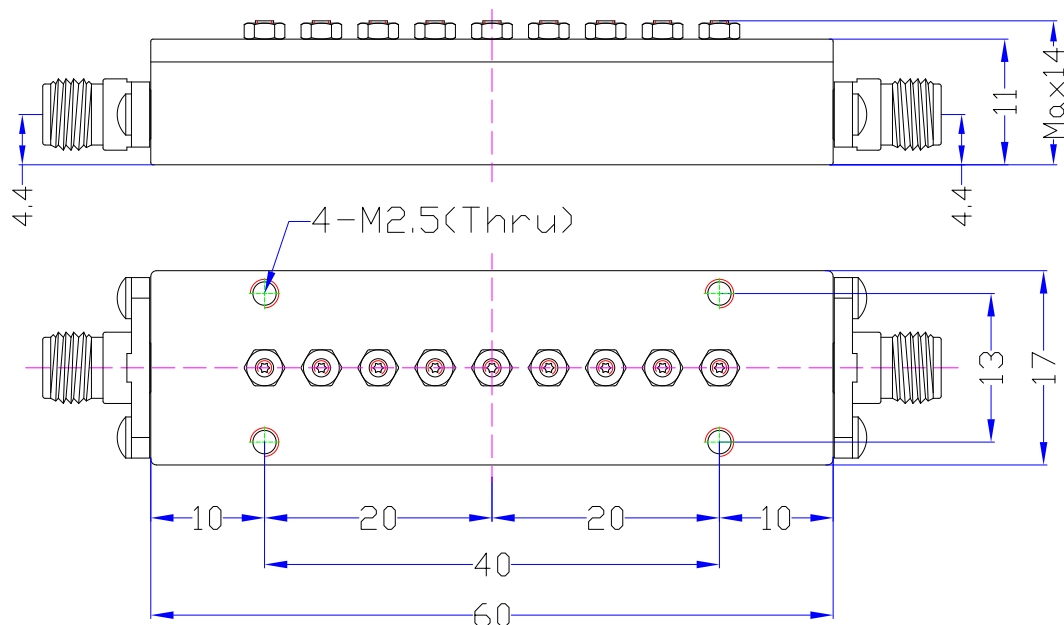

** The actual design bandwidth will be greater than the Pass Band Frequency, and there is no bandwidth limit.