


WT-A1258-Q05

腔体滤波器

技术指标

Serial	Parameters	
1	Center Frequency(F0)	3.86GHz
2	Bandwidth	50MHz (3.835~3.885GHz)
3	Insertion Loss	≤2.0dB
4	VSWR	≤1.5:1
5	Rejection	≥50dB @ DC~3.66GHz ≥50dB @ 4.06~12GHz ≥40dB @ F0/2, 2*F0, 3*F0 (±1MHz)
6	Port Connectors	SMA-Female
7	Impedance	50 ohms
8	Surface Finish	The Original Silver Color
9	Configuration	As Below (Size Unit: mm)

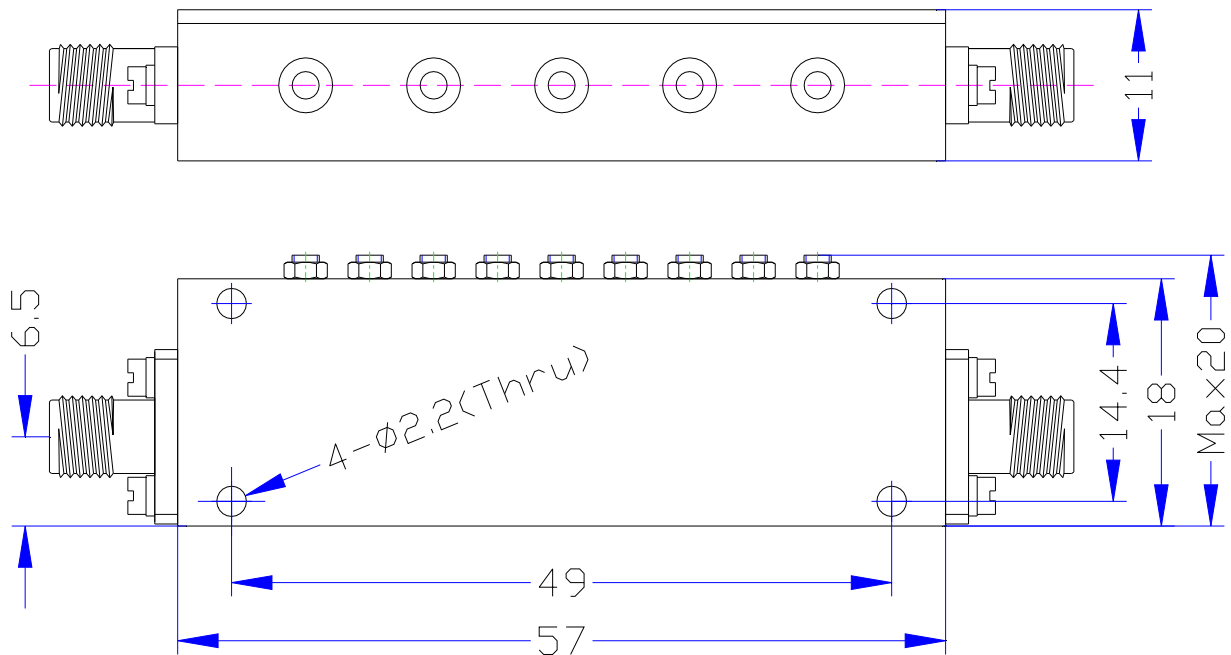

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd
<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com
 TEL:+86-028-84300332 FAX:+86-028-84300332
 地址:中国 成都市高新区桂溪路 223 号 610041
 Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041
 第4页 共4页