
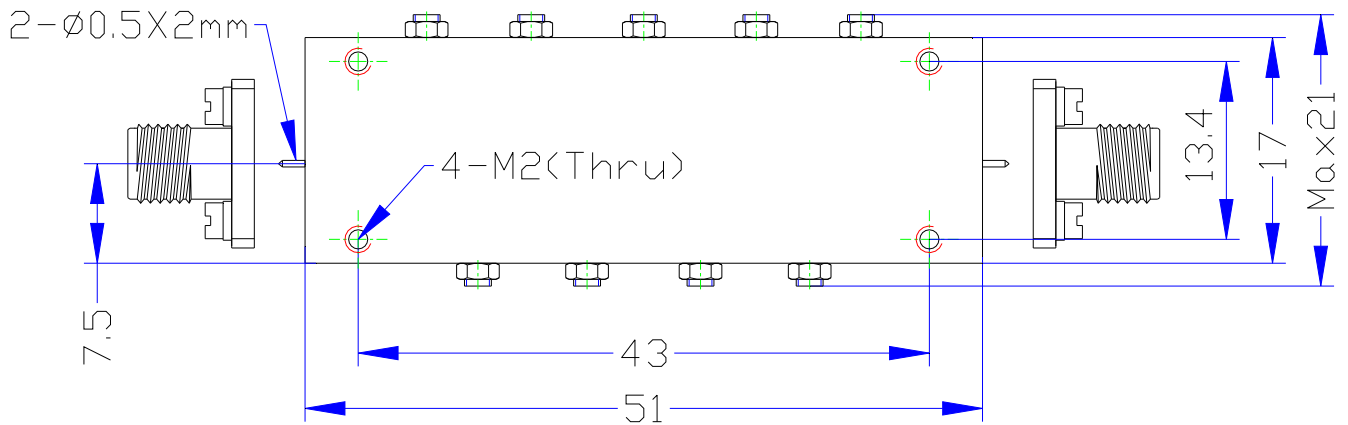


WT-A1288-J09

Interdigital Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	5.5GHz
2	Operating Frequency	4.9~6.1GHz (F0=5.5GHz)
3	Insertion Loss	≤2.0dB
4	Ripple in Band	≤1.0dB
5	VSWR	≤1.8:1
6	Rejection	≥30dBc @ DC~4.5GHz ≥30dBc @ 6.5~8.0GHz ≥65dBc @ 8.0~10GHz
7	Surface Finish	The Original Silver Color
8	Power	1W
9	Connectors	ø0.5*2mm needle SMA-Female (removable)
10	Net Weight	TBD
11	Configuration	As Below (Size Unit: mm)



WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051