


WT-A1850-R09

Cavity Band Rejection Filter

Specifications

Serial	Parameters	
1	Stop Band Frequency	925~960MHz
2	Stop Band Attenuation	≥50dB
3	Pass Band Frequency	DC~907MHz & 978~2700MHz
4	Pass Band Insertion Loss	≤1.5dB
5	Pass Band VSWR	≤1.5:1
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤50W
9	Connectors	SMA-Female
10	Configuration	As Below (Size Unit: mm)

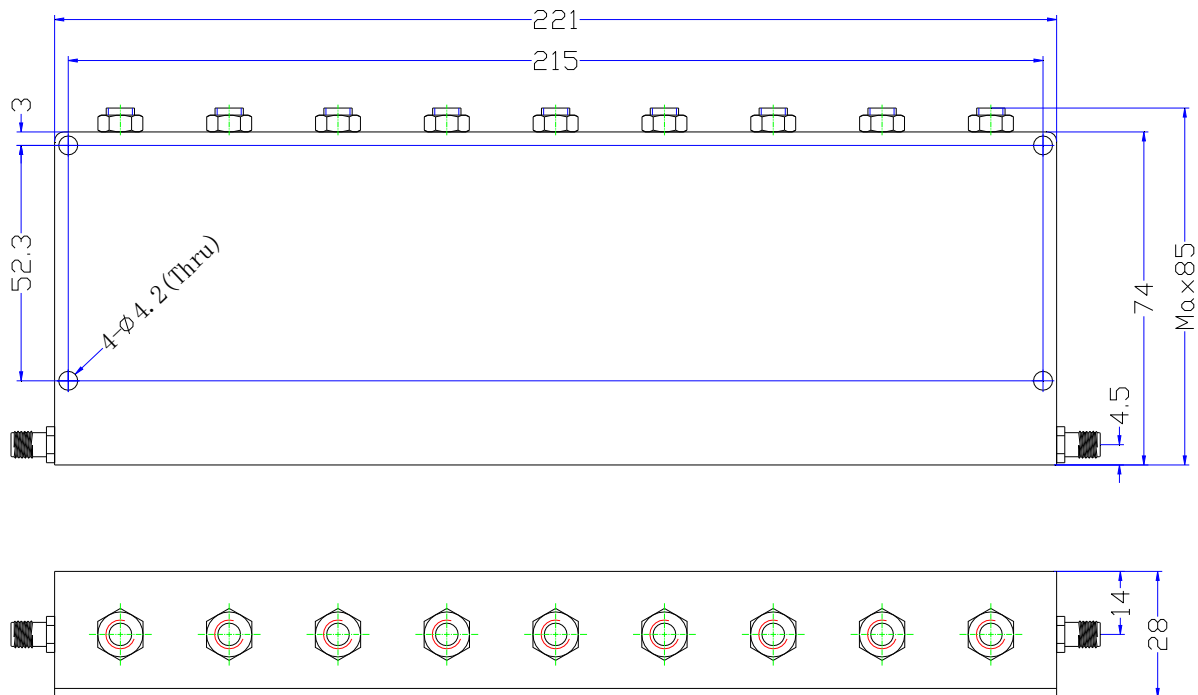

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051