
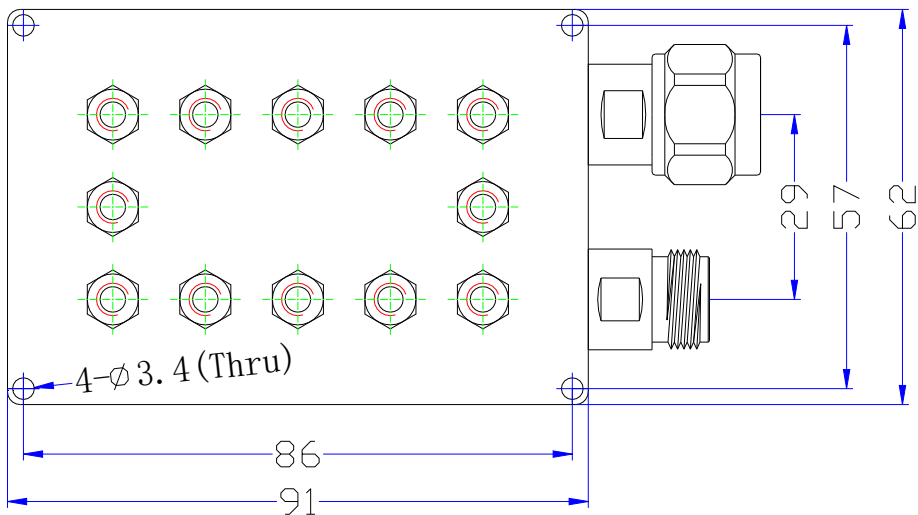


WT-A2565-Q06

Cavity Band Pass Filter

Specifications

| Serial | Parameters | |
|--------|--------------------------|---|
| 1 | Center Frequency (F0) | 1890MHz |
| 2 | Pass Band Frequency | 1880~1900MHz |
| 3 | Pass Band Insertion Loss | ≤2.0dB |
| 4 | Pass Band Return Loss | ≥20dB |
| 5 | Stop Band Attenuation | ≥40dB @ F0±20MHz (DC~1870MHz、1910~3000MHz) |
| 6 | Impedance | 50 ohms |
| 7 | Surface Finish | Black Paint |
| 8 | Power Handling | ≤10W |
| 9 | Connectors | N-Male / N-Female |
| 10 | Net Weight | 0.28 KG |
| 11 | Configuration | As Below (Size Unit: mm) |

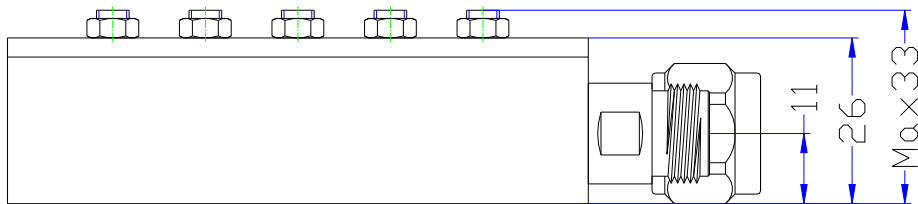

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051