


# WT-A0234-Q08

## Cavity Filter

### Specifications

Serial	Parameters	
1	Center Frequency (F0)	1300MHz
2	3.0dB Bandwidth	42MHz (1279~1321MHz)
3	Insertion Loss	≤1.5dB@1300MHz
4	Passband Ripple	≤2.0dB@ F0±20MHz (1280~1320MHz)
5	Return Loss	≥14dB@ F0±20MHz (1280~1320MHz)
6	Stopband Attenuation	≥40dBc@1265MHz ≥40dBc@ 1335MHz ≥60dBc@ 1200~1255MHz ≥60dBc@ 1345~1400MHz
7	Power Handling	30dBm
8	Surface Finish	Black Paint
9	Connectors	SMA-Female
10	Net Weight	0.315 KG
11	Configuration	As Below

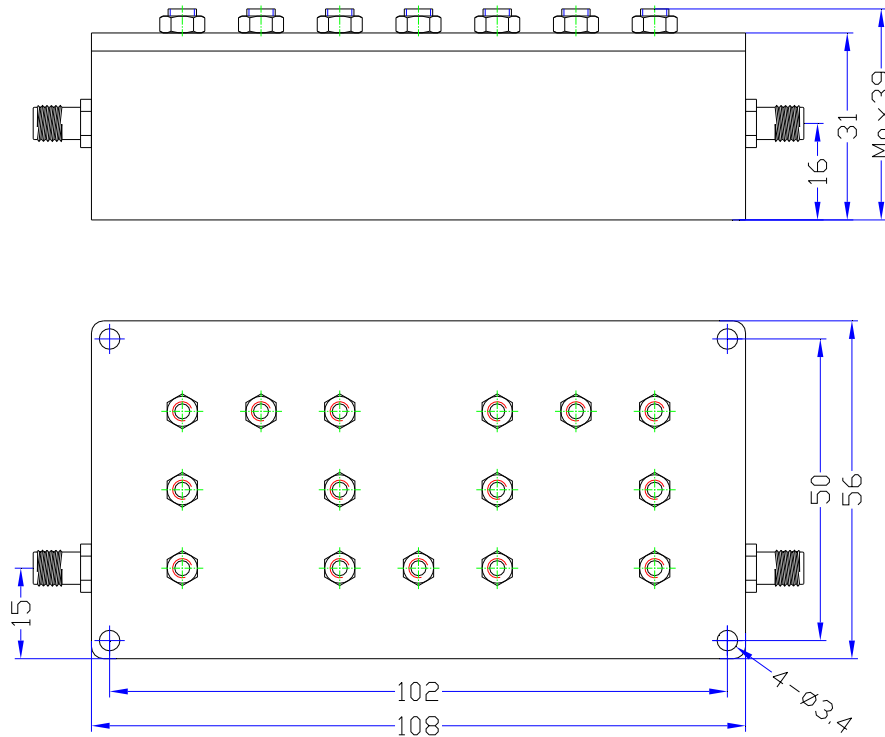

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051