


WT-A0301-Q03

腔体滤波器

技术指标

| Serial | Parameters | |
|--------|-----------------------|----------------|
| 1 | Frequency Range | 1700~1720MHz |
| 2 | Insertion Loss | ≤0.8dB |
| 3 | VSWR | ≤1.2:1 |
| 4 | Rejection | ≥60dB @ 800MHz |
| 5 | Port Connectors | SMA-Female |
| 6 | Power | 100W |
| 7 | Operating Temperature | -30℃~+75℃ |
| 8 | Surface Finish | Black Paint |
| 9 | Configuration | As Below |

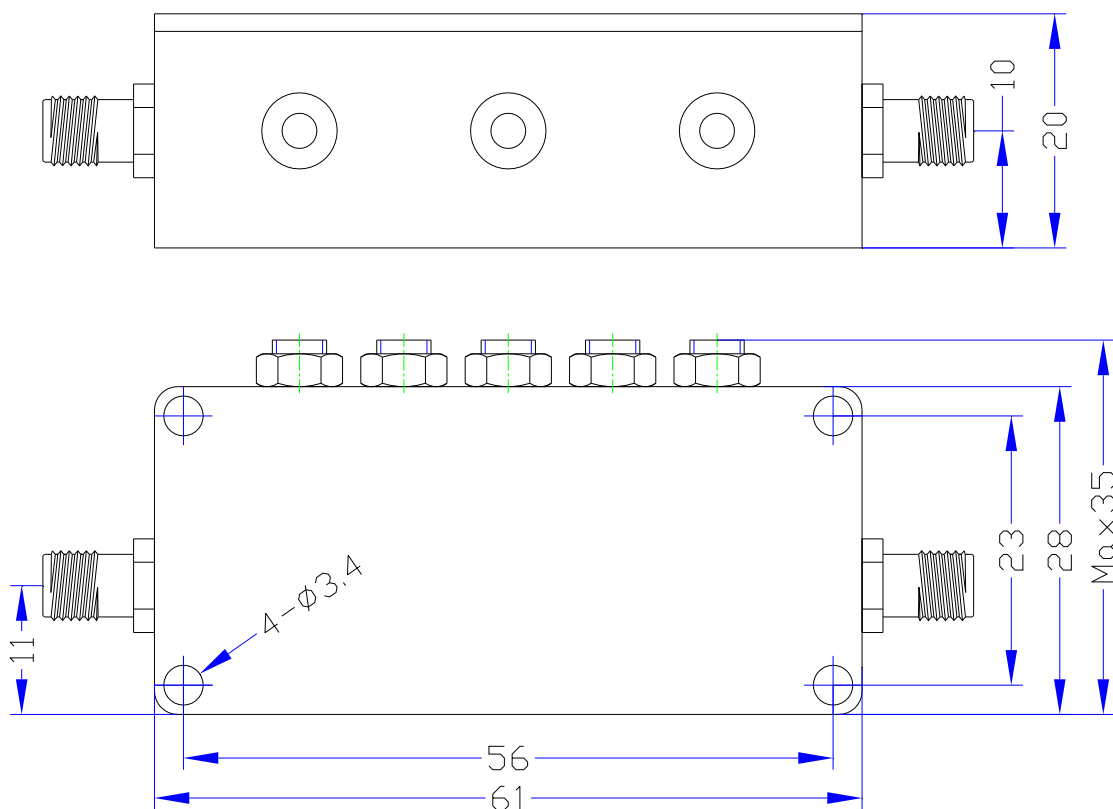

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041