


# WT-A3108-J09

## Interdigital Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency(F0)	1402.5MHz
2	Pass Band Frequency	1182~1623MHz
3	Insertion Loss at Center Frequency	≤1.0dB
4	Pass Band VSWR	≤1.5:1
5	Stop Band Rejection	≥60dB@ F0±497.5MHz (DC~905MHz、1900~3000MHz)
6	Impedance	50 ohms
7	Surface Finish	The Original Silver Color or Black Paint
8	Power Handling	≤5W
9	Connectors	SMA-Female
10	Net Weight	0.075 KG
11	Configuration	As Below (Size Unit: mm)

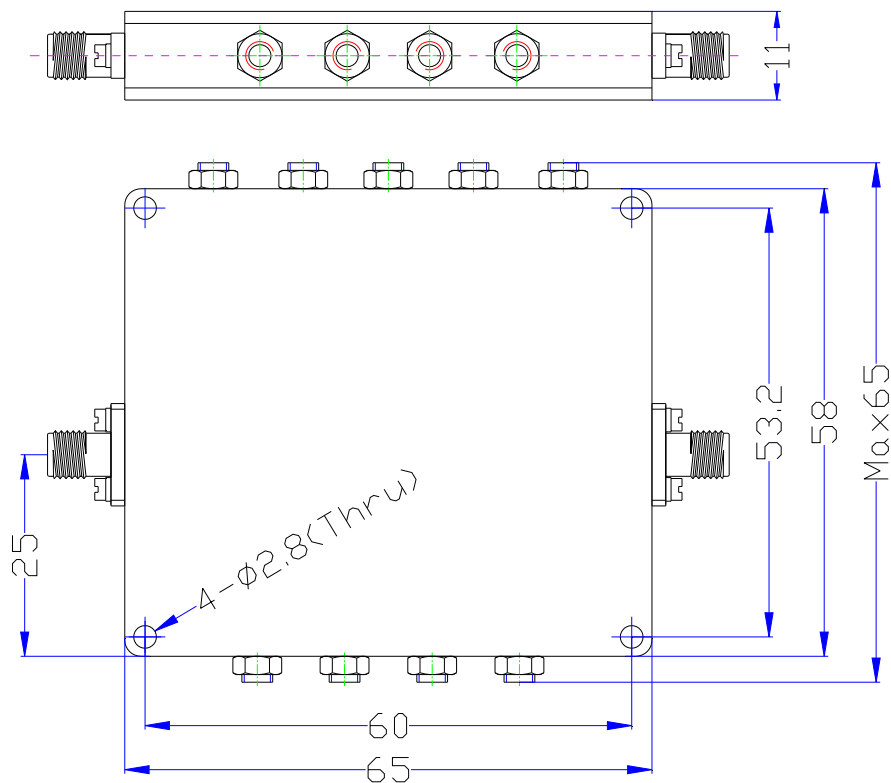

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051