


WT-A3167-Q07

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	3500MHz
2	Pass Band Frequency	3400~3600MHz
3	Pass Band Insertion Loss	≤1.5dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Attenuation	≥50dB @ F0±300MHz (DC~3200MHz、3800~6000MHz)
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤10W
9	Connectors	N-Female
10	Net Weight	0.115 KG
11	Configuration	As Below (Size Unit: mm)

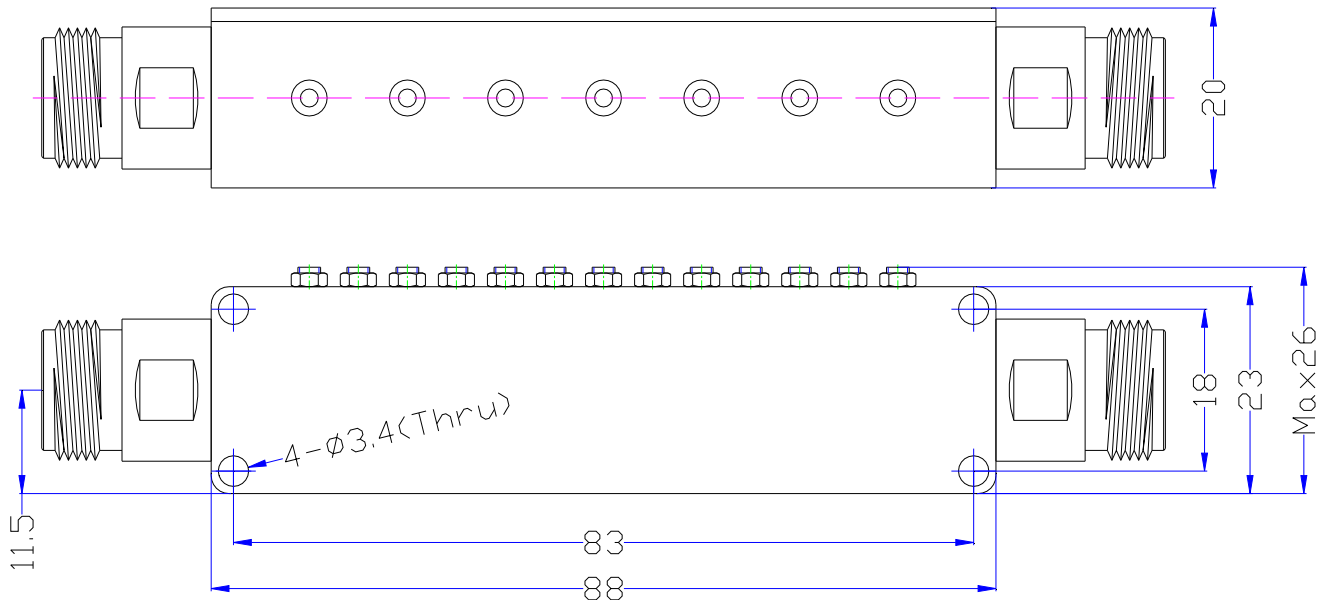

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051