


## WT-A3388-S05

### Comb Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency(F0)	2100MHz
2	3dB Bandwidth	120MHz (2040~2160MHz)
3	Insertion Loss at F0	≤1.0dB @ 2100MHz
4	VSWR	≤1.3:1 @ 2060~2140MHz
5	Stop Band Attenuation	≥35dB @ 1950MHz ≥35dB @ 2250MHz
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤5W
9	Connectors	Input: SMA-Male / Output: SMA-Female
10	Net Weight	0.06 KG
11	Configuration	As Below (Size Unit: mm)

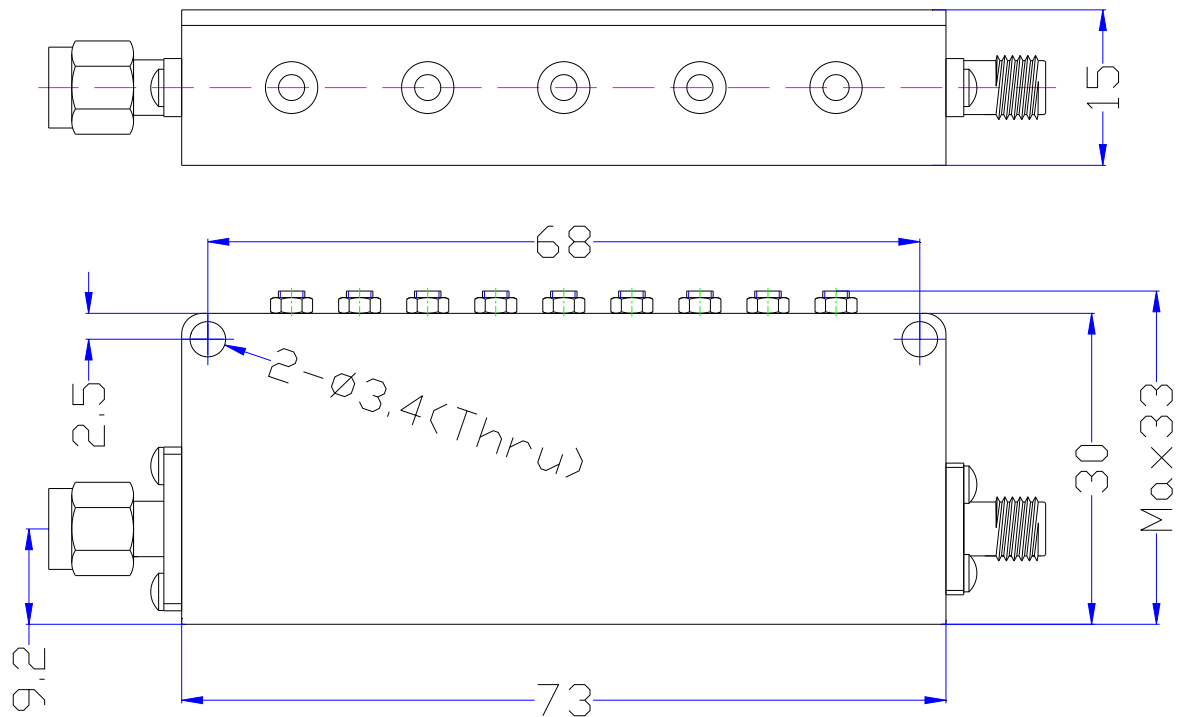

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: [tech@wtmicrowave.com](mailto:tech@wtmicrowave.com) [sales@wtmicrowave.com](mailto:sales@wtmicrowave.com)

<http://www.cdweitong.com> E-mail: [tech@cdweitong.com](mailto:tech@cdweitong.com) [sales@cdweitong.com](mailto:sales@cdweitong.com)

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051