


WT-A3390-S06

Comb Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency(F0)	2365MHz
2	3dB Bandwidth	500MHz (2115~2615MHz)
3	Insertion Loss at F0	≤1.0dB @ 2365MHz
4	Amplitude Flatness	≤0.5dB @ 2271~2459MHz
5	VSWR	≤1.3:1 @ 2180~2550MHz
6	Group Delay Flatness	≤0.5ns @ 2271~2459MHz
7	Stop Band Attenuation	≥60dB @ 1000MHz ≥60dB @ 4000MHz
8	Impedance	50 ohms
9	Surface Finish	Black Paint
10	Power Handling	≤5W
11	Connectors	Input: SMA-Male / Output: SMA-Female
12	Net Weight	0.055 KG
13	Configuration	As Below (Size Unit: mm)

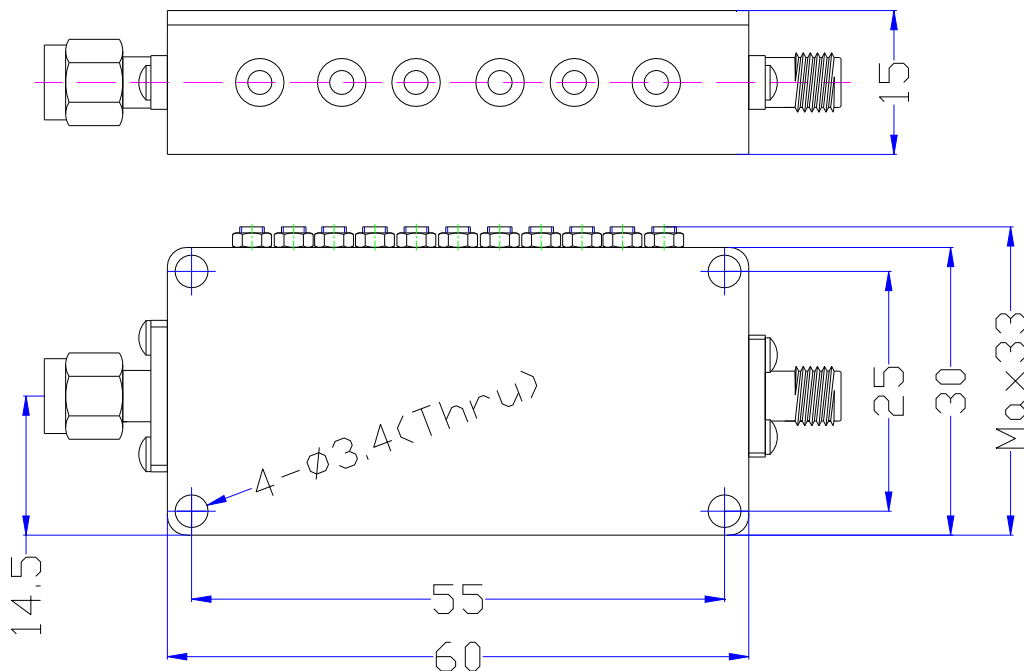

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051