


WT-A3488-Q06

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	1310.5MHz
2	Bandwidth	28MHz (1296.5~1324.5MHz)
3	Pass Band Insertion Loss	≤2.0dB
4	Pass Band Ripple	≤0.7dB
5	Pass Band VSWR	≤1.3:1
6	Stop Band Attenuation	≥20dB @ DC~1286.5MHz ≥20dB @ 1334.5~4000MHz
7	Impedance	50 ohms
8	Surface Finish	Black Paint
9	Power Handling	≤20W
10	Connectors	SMA-Female
11	Temperature Range	-10°C ~ +70°C
12	Net Weight	0.295 KG
13	Configuration	As Below (Size Unit: mm)

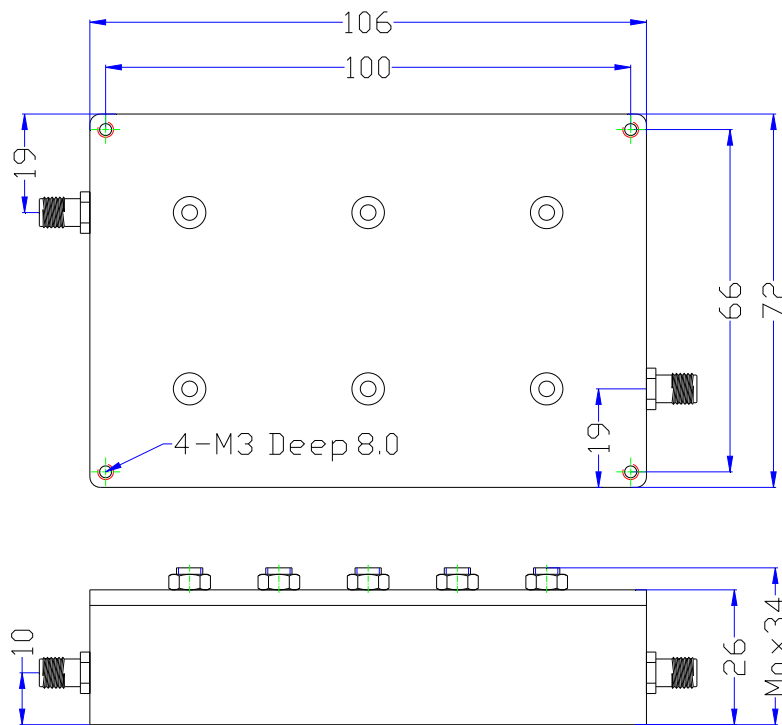

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051