
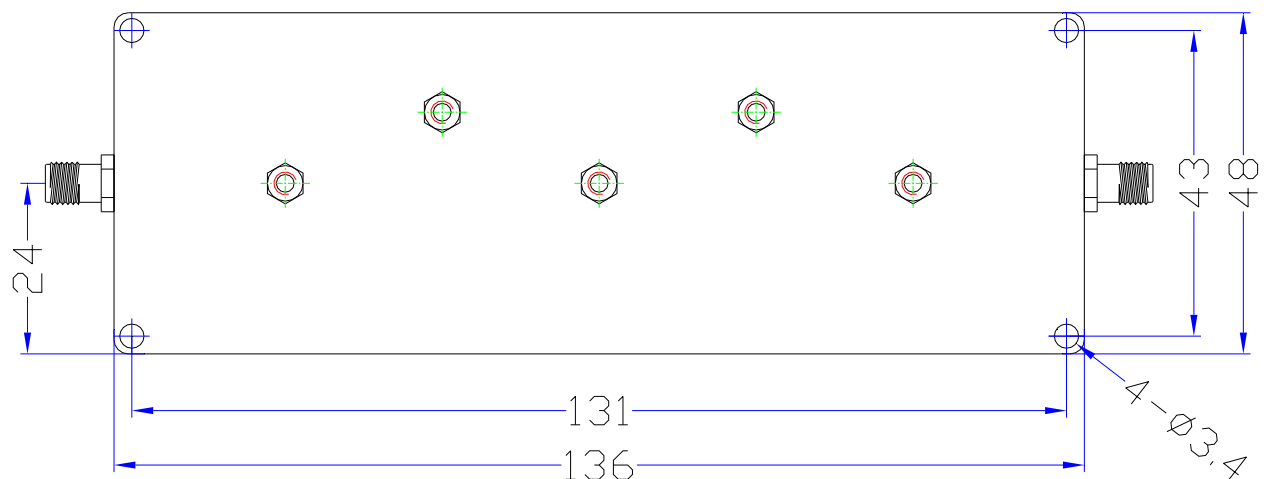


WT-A0338-Q03

腔体滤波器

技术指标

Serial	Parameters	
1	中心频率(Center Frequency)	1664.2MHz
2	带宽(Bandwidth)	6MHz (1661.2~1667.2MHz)
3	插入损耗(Insertion Loss)	$\leq 1.2\text{dB}@1664.2\text{MHz}$
4	驻波比(VSWR)	$\leq 1.3:1@1664.2\text{MHz}$
5	带外抑制(Rejection)	$\geq 40\text{dB}@ F0 \pm 40\text{MHz}(1624.2\text{MHz}, 1704.2\text{MHz})$
6	表面处理(Surface Finish)	黑色烤漆(Black Paint)
7	功率容量(Power Handling)	50W
8	接口形式(Connectors)	SMA-Female
9	外形结构图(Configuration)	As Below

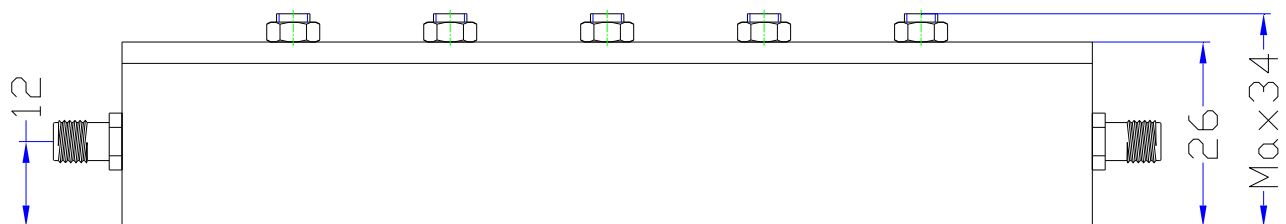

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041