


WT-A3494-Q06

腔体带通滤波器

技术指标

Serial	Parameters	
1	中心频率(Center Frequency) [F0]	706MHz
2	通带带宽(Pass Band Bandwidth)	$\pm 3.8\text{MHz}$ (702.2~709.8MHz)
3	插入损耗(Insertion Loss)	$\leq 2.0\text{dB}$
4	带内波动(Ripple in Band)	$\leq 0.8\text{dB}$
5	驻波比(VSWR)	$\leq 1.2:1$
6	带外抑制(Rejection)	$\geq 20\text{dB}$ @ $F0 \pm 7.56\text{MHz}$ (698.44MHz、713.56MHz) $\geq 40\text{dB}$ @ $F0 \pm 12.2\text{MHz}$ (693.8MHz、718.2MHz)
7	功率(Power)	$\leq 20\text{W}$
8	阻抗(Impedance)	50 ohms
9	接口形式(Connectors)	N-Female
10	温度范围(Temperature Range)	$-20^{\circ}\text{C} \sim +55^{\circ}\text{C}$
11	表面处理(Surface Finish)	黑色烤漆 (Black Paint)
12	净重(Net Weight)	0.49 KG
13	外形结构图(Configuration)	As Below (Size Unit: mm)

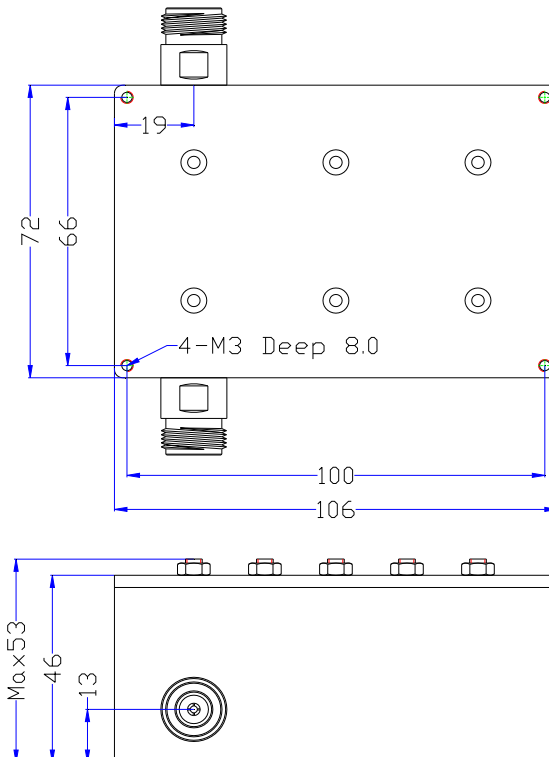

成都微通科技有限公司 WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

地址:中国 成都市成华区建材路 37 号 1-1108 610051