WT-A0548-BLC

LC Band Pass Filter

Specifications
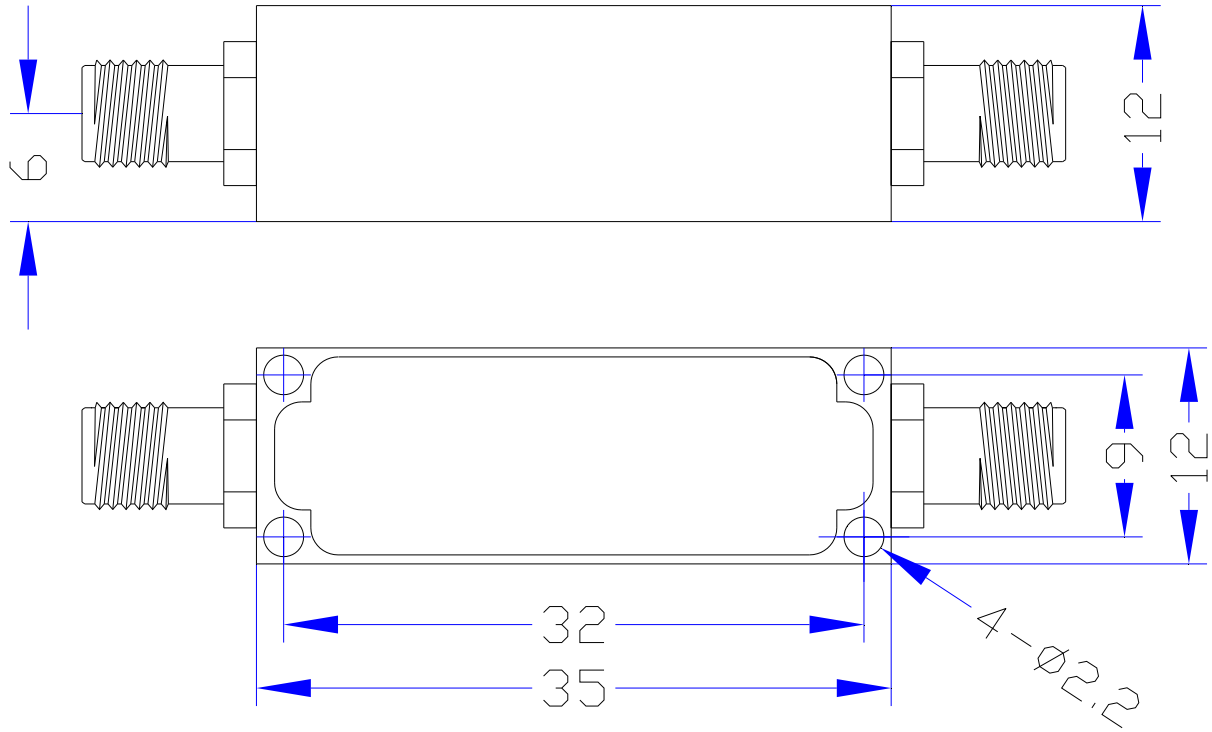
Serial	Parameters	
1	Center Frequency (F0)	2MHz
2	3dB Bandwidth	1MHz (1.5～2.5MHz)
3	Insertion Loss @ Center Frequency	≤2.0dB @ 2MHz
4	Ripple in Band	≤1.0dB @ 0.6MHz Bandwidth (1.7～2.3MHz)
5	VSWR	≤1.5:1 @ 2MHz
6	Rejection	≥40dB@ 1MHz ≥40dB@ 3MHz
7	Group Delay	≤3800ns @ 2MHz
8	Impedance	50 ohms
9	Surface Finish	Nickel Plating (Chemical nickel)
10	Connectors	SMA-Female
11	Configuration	As Below (Size Unit: mm)