


WT-A3580-J13

Interdigital Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency(F0)	22.2GHz
2	Pass Band Frequency	20.3~24.1GHz
3	Pass Band Insertion Loss	≤2.0dB
4	Pass Band VSWR	≤1.8:1
5	Stop Band Attenuation	≥45dB @ 19.2GHz ≥45dB @ 25.2GHz ≥70dB @ 18.4GHz ≥70dB @ 26GHz
6	Impedance	50 ohms
7	Power	≤10W
8	Surface Finish	The Original Silver Color or Black Paint
9	Connectors	2.92mm-Female
10	Temperature Range	-40℃~+80℃
11	Net weight	0.035 KG
12	Configuration	As Below (Size Unit: mm)

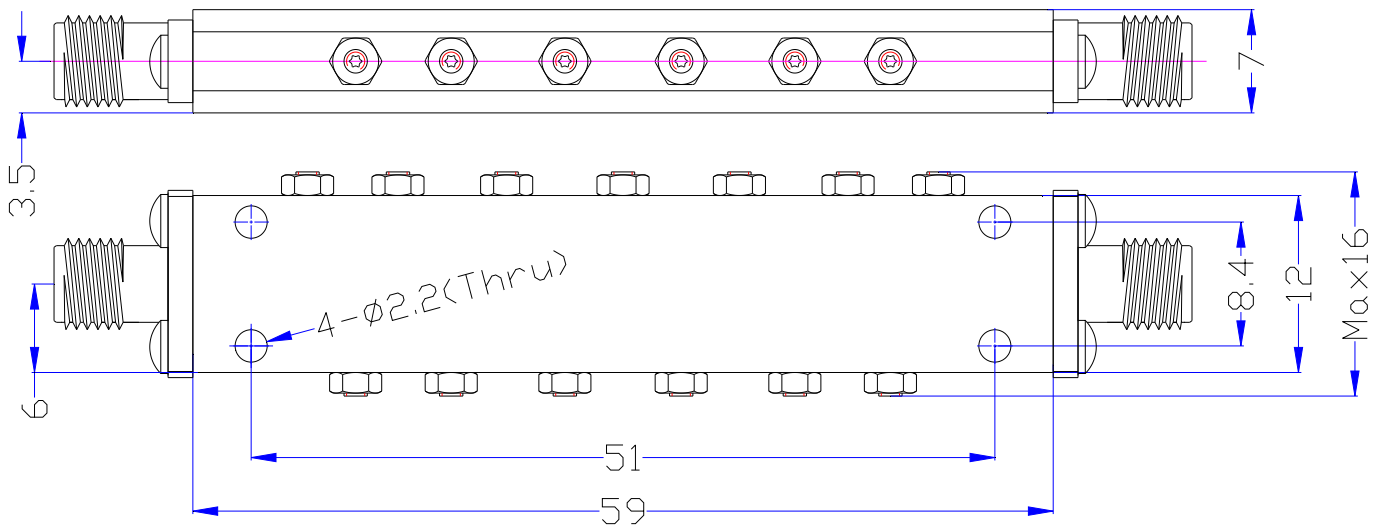

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051