


WT-A0563-LS

悬置基片带线低通滤波器

技术指标

Serial	Parameters	
1	Pass Band Frequency	DC~2000MHz
2	Insertion Loss	≤2.0dB (Type≤1.0dB)
3	VSWR	≤2.0:1 (Type≤1.3:1)
4	Rejection	≥62dB @ 2800~11000MHz
5	Power	≤5W
6	Surface Finish	Guide Oxygen or Black Paint
7	Port Connectors	SMA-Female
8	Configuration	As Below (Size Unit: mm)

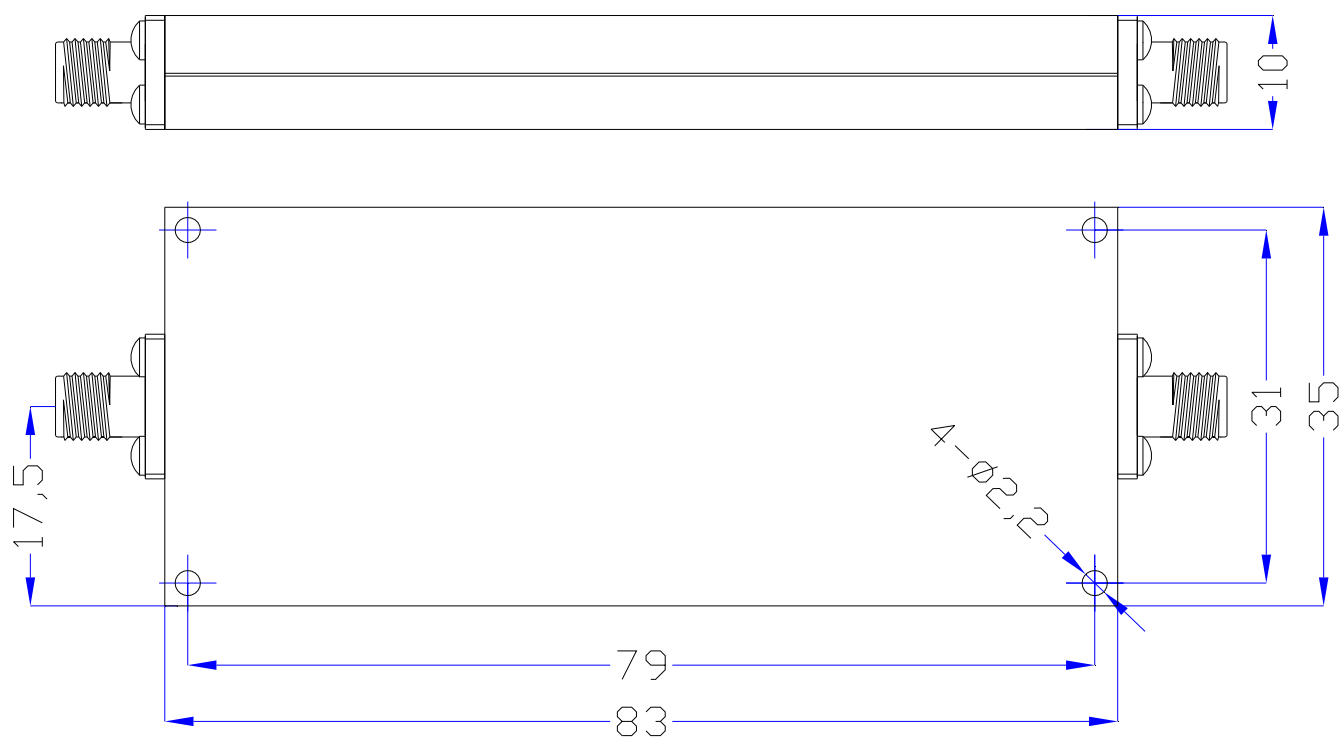

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332 FAX:+86-28-84300332-807

地址:中国 成都市成华区建材路 37 号 1-1108 610051

ADD: 11F-1108, Building#1, NO.37, Jiancai Road, Chengdu 610051, China. Zip Code:610051