


WT-A3588-BS

2.0-18GHz Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency	10GHz
2	Pass Band Frequency	2.0~18GHz
3	Pass Band Insertion Loss	$\leq 1.5\text{dB @ } 2.0\sim 2.2\text{GHz}$ $\leq 1.0\text{dB @ } 2.2\sim 16\text{GHz}$ $\leq 2.5\text{dB @ } 16\sim 18\text{GHz}$
4	Pass Band VSWR	$\leq 1.6:1$
5	Stop Band Attenuation	$\geq 50\text{dB @ } \text{DC}\sim 1.55\text{GHz}$ $\geq 50\text{dB @ } 19\sim 25\text{GHz}$
6	Impedance	50 ohms
7	Power	$\leq 15\text{W}$
8	Connectors	SMA-Female
9	Surface Finish	Guided Oxygen or Black Paint
10	Temperature Range	$-40^{\circ}\text{C}\sim +80^{\circ}\text{C}$
11	Net weight	0.04 KG
12	Configuration	As Below (Size Unit: mm)

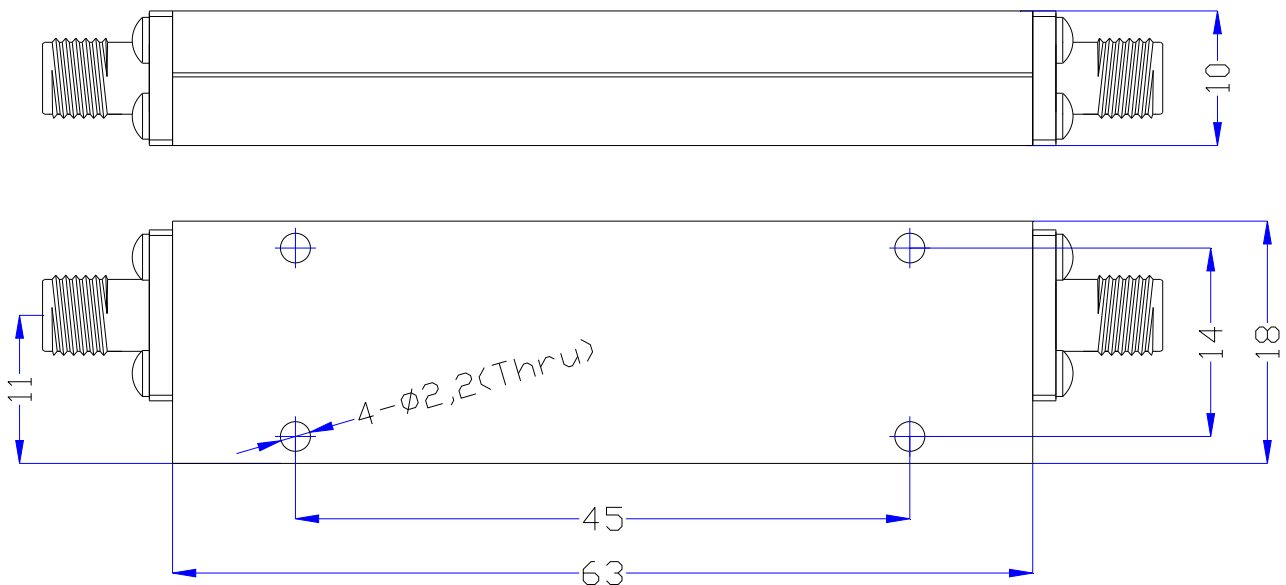

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL: +86-28-84300332/84300037 FAX: +86-28-84300332-807

Add: Chengdu of China Zip Code: 610051