


WT-A0587-J11

交指滤波器

技术指标

Serial	Parameters	
1	Center Frequency	15400MHz
2	1.0dB Bandwidth	5000MHz (12900~17900MHz)
3	Insertion Loss	≤2.0dB
4	Ripple	≤±0.75dB
5	VSWR	≤2.0:1 (Type≤1.7:1)
6	Stop Band Attenuation	≥49dBc @ 10800MHz ≥44dBc @ 20000MHz
7	Port Connectors	SMA-Female
8	Operating Temperature	25℃~25℃
9	Storage Temperature	-40℃~+85℃
10	Power Handling	+20dBm CW +23dBm Instantaneous Peak
11	Surface Finish	The Original Silver Color
12	Configuration	As Below (Size Unit: mm)

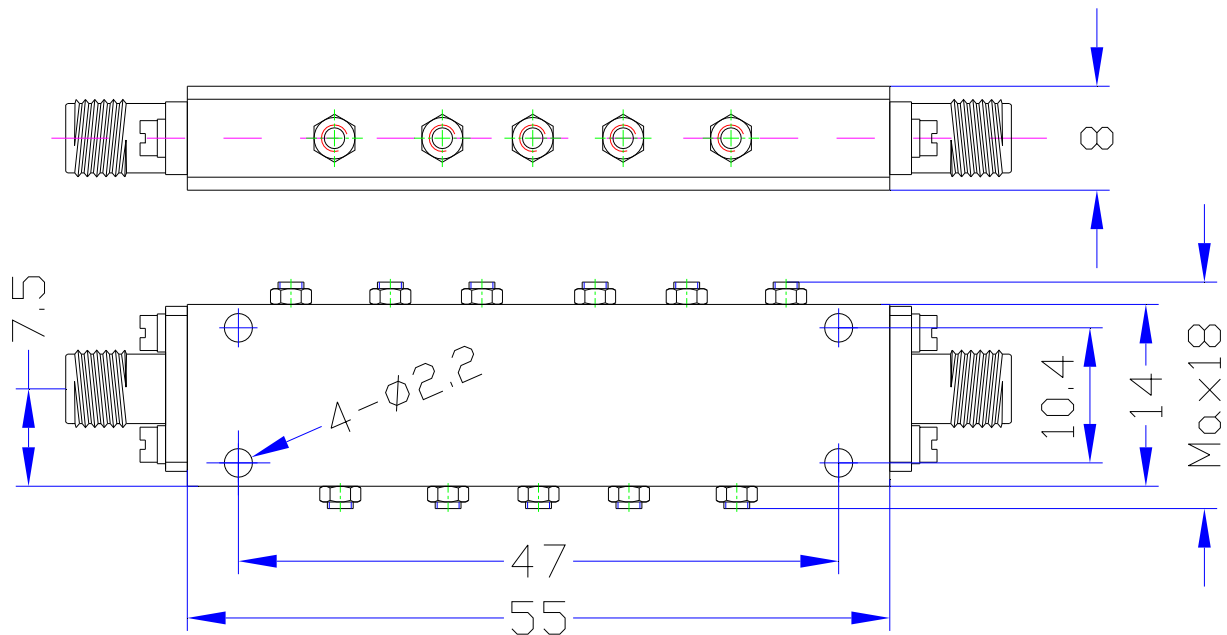

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041