


WT-A0602-J13

交指滤波器

技术指标

Serial	Parameters	
1	Frequency Range	2700~3400MHz (F0=3050MHz)
2	Insertion Loss at Center Frequency	≤0.7dB @ 3050MHz
3	VSWR	≤1.5:1
4	Rejection	≥55dB @ 2550MHz ≥50dB @ 3550MHz
5	Port Connectors	SMA-Female
6	Surface Finish	The Original Silver Color
7	Configuration	As Below (Size Unit: mm)

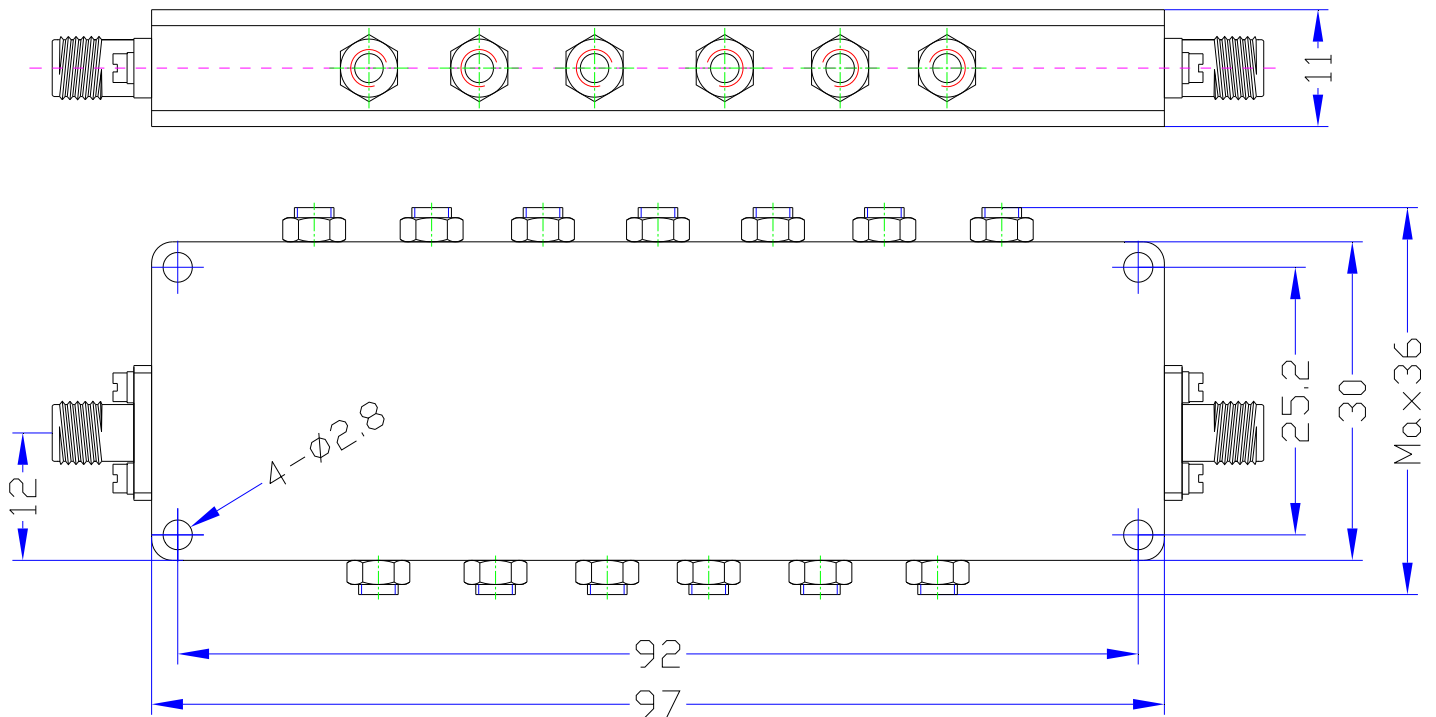

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041