


## WT-A0629-Q06

### 腔体带通滤波器

### 技术指标

Serial	Parameters	
1	中心频率(Center Frequency)	1090MHz
2	带宽(Bandwidth)	$\pm 6\text{MHz}$ (1084~1096MHz)
3	插入损耗(Insertion Loss)	$\leq 2.2\text{dB}$ (Type $\leq 2.0\text{dB}$ )
4	驻波比(VSWR)	$\leq 1.3:1$
5	带外抑制(Rejection)	$\geq 20\text{dB}@ F0 \pm 10\text{MHz}$ (1080MHz, 1100MHz) $\geq 40\text{dB}@ F0 \pm 15\text{MHz}$ (1075MHz, 1105MHz) $\geq 60\text{dB}@ F0 \pm 25\text{MHz}$ (1065MHz, 1115MHz)
6	表面处理(Surface Finish)	黑色烤漆(Black Paint)
7	功率容量(Power Handling)	50W
8	接口形式(Connectors)	SMA-Female
9	净重 (Net Weight)	0.34 KG
10	外形结构图(Configuration)	As Below (Size Unit: mm)

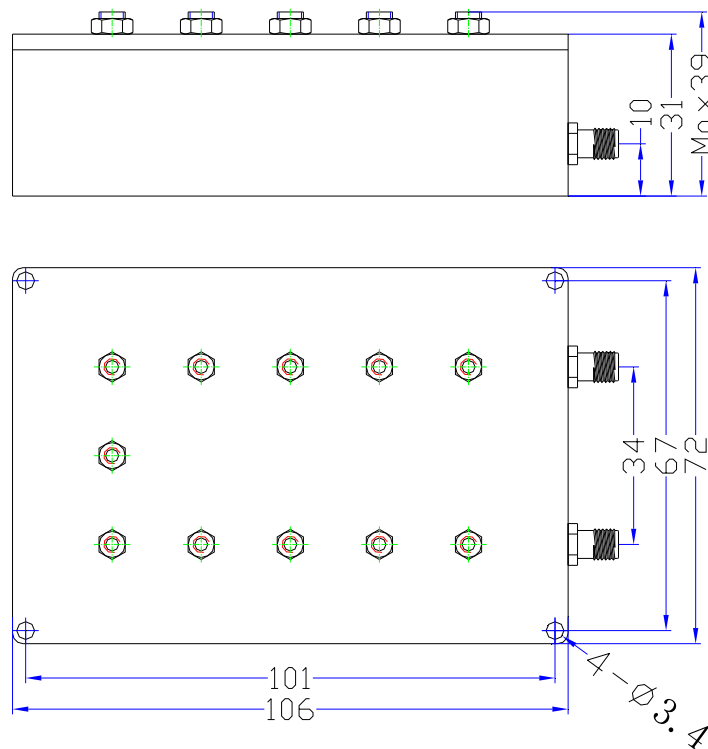

成都微通科技有限公司 WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: [tech@wtmicrowave.com](mailto:tech@wtmicrowave.com) [sales@wtmicrowave.com](mailto:sales@wtmicrowave.com)

<http://www.cdweitong.com> E-mail: [tech@cdweitong.com](mailto:tech@cdweitong.com) [sales@cdweitong.com](mailto:sales@cdweitong.com)

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

地址:中国 成都市成华区建材路 37 号 1-1108 610051