


WT-A4852-J09

Interdigital Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency(F0)	9.8GHz
2	Pass Band Frequency	8.2~11.4GHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band Return Loss	≥14dB
5	Stop Band Attenuation	≥30dB @ DC~6.9GHz ≥30dB @ 12.45~17GHz
6	Impedance	50 ohms
7	Power Handling	≤5W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	-30℃ ~ +70℃
11	Net Weight	0.025 KG
12	Configuration	As Below (Size Unit: mm)

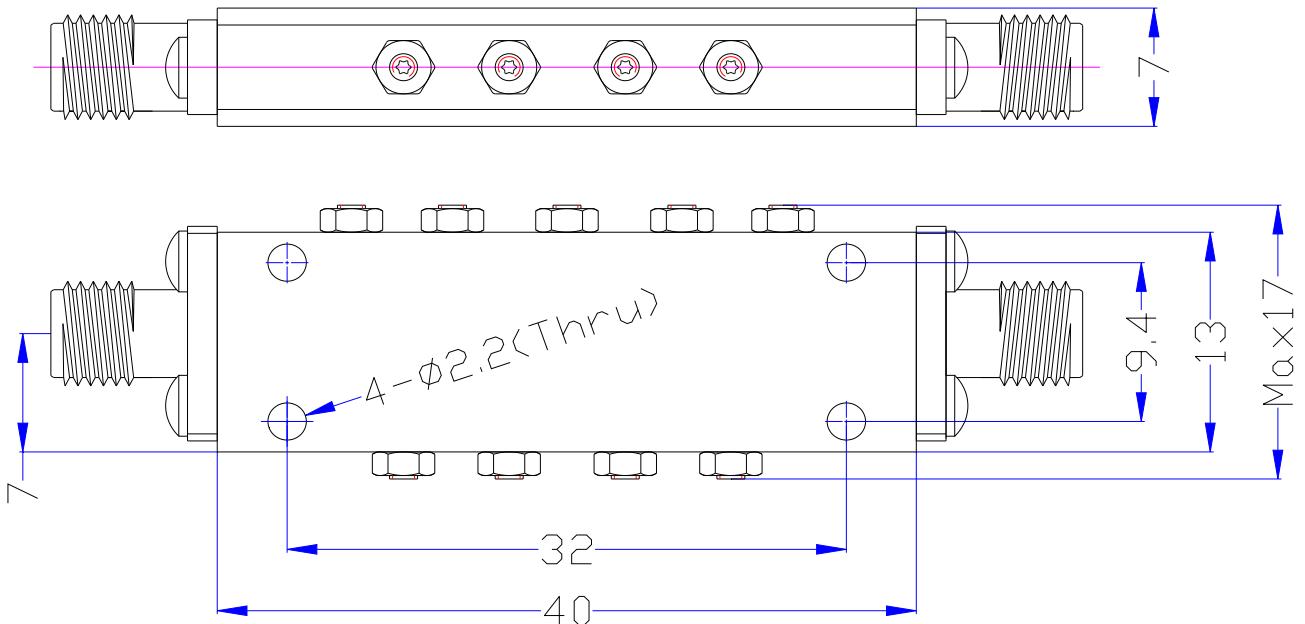

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051