


WT-A4857-J11

Interdigital Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency(F0)	23GHz
2	Pass Band Frequency	20~26GHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.7:1
5	Stop Band Attenuation	≥55dB @ 13GHz ≥55dB @ 30GHz
6	Impedance	50 ohms
7	Power	≤2W
8	Surface Finish	Black Paint
9	Connectors	SMA-Female
10	Temperature Range	-30°C ~ +70°C
11	Net weight	0.0314 KG
12	Configuration	As Below (Size Unit: mm)

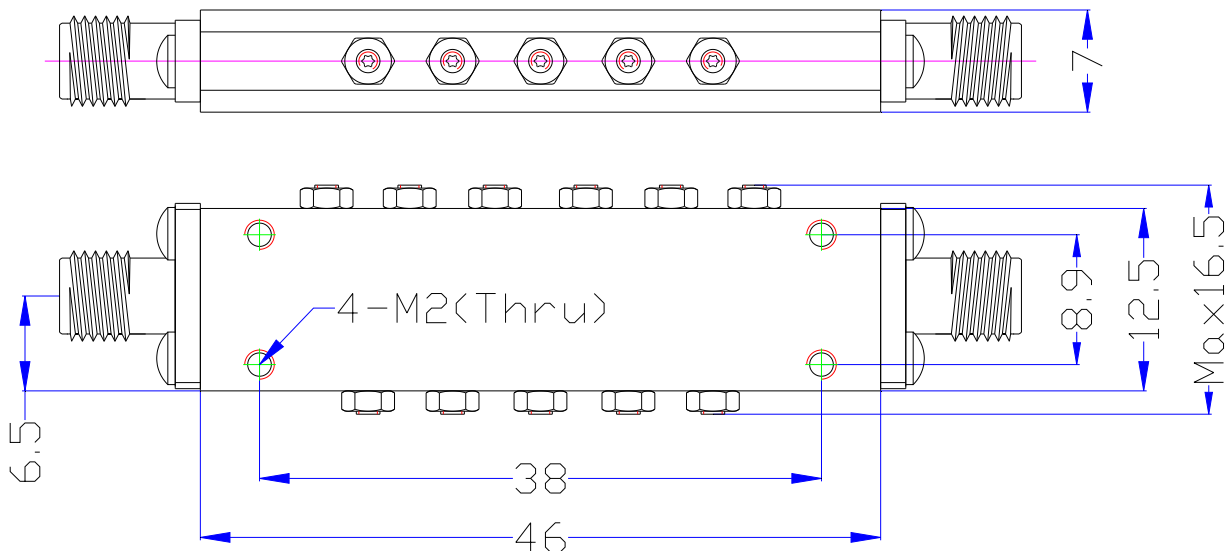

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051