


WT-A5011-Q07

Comb Band Pass Filter

Specifications

| Serial | Parameters | |
|--------|--------------------------|---|
| 1 | Center Frequency (F0) | 920MHz |
| 2 | Pass Band Frequency | 880~960MHz |
| 3 | Pass Band Insertion Loss | ≤1.0dB |
| 4 | Pass Band Ripple | ≤0.8dB |
| 5 | Pass Band Return Loss | ≥18dB |
| 6 | Stop Band Rejection | ≥60dB @ DC~780MHz ≥55dB @ 1060~2500MHz |
| 7 | Impedance | 50 ohms |
| 8 | Power Handling | ≤50W |
| 9 | Connectors | SMA-Female |
| 10 | Surface Finish | Black Paint |
| 11 | Temperature Range | -30℃~+60℃ |
| 12 | Net Weight | 0.345 KG |
| 13 | Configuration | As Below (Size Unit: mm) |

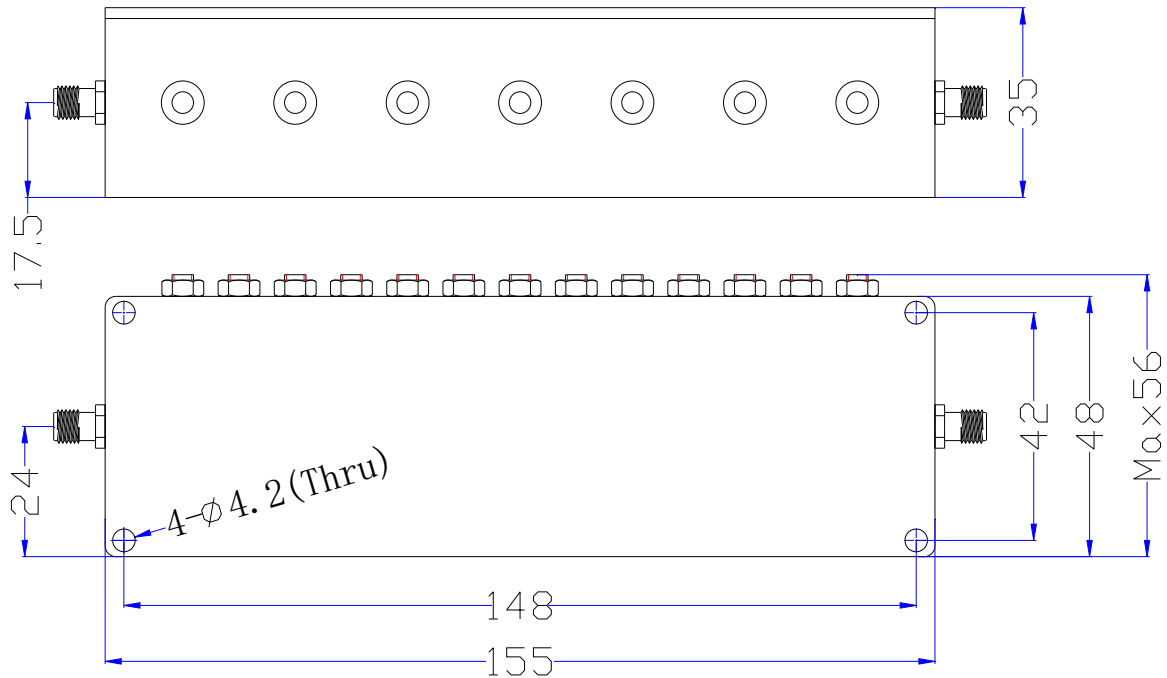

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051