


WT-A0783-S08

梳状滤波器

技术指标

Serial	Parameters	
1	频率范围(Frequency Range)	11.1~12GHz (F0=11.55GHz)
2	插入损耗(Insertion Loss)	≤1.5dB
3	带内波动(Ripple in Band)	≤1.0dB
4	驻波比(VSWR)	≤1.7:1 (Type≤1.5:1)
5	带外抑制(Rejection)	≥75dB@ 9.3GHz ≥40dB@ 12.4GHz ≥70dB@ 12.7GHz
6	表面处理(Surface Finish)	镀银本色 (The Original Silver Color)
7	温度范围(Temperature Range)	-40℃~+75℃
8	接口形式(Connectors)	∅0.5*2mm针 SMA-Female (可拆卸)
9	外形结构图(Configuration)	As Below (Size Unit: mm)

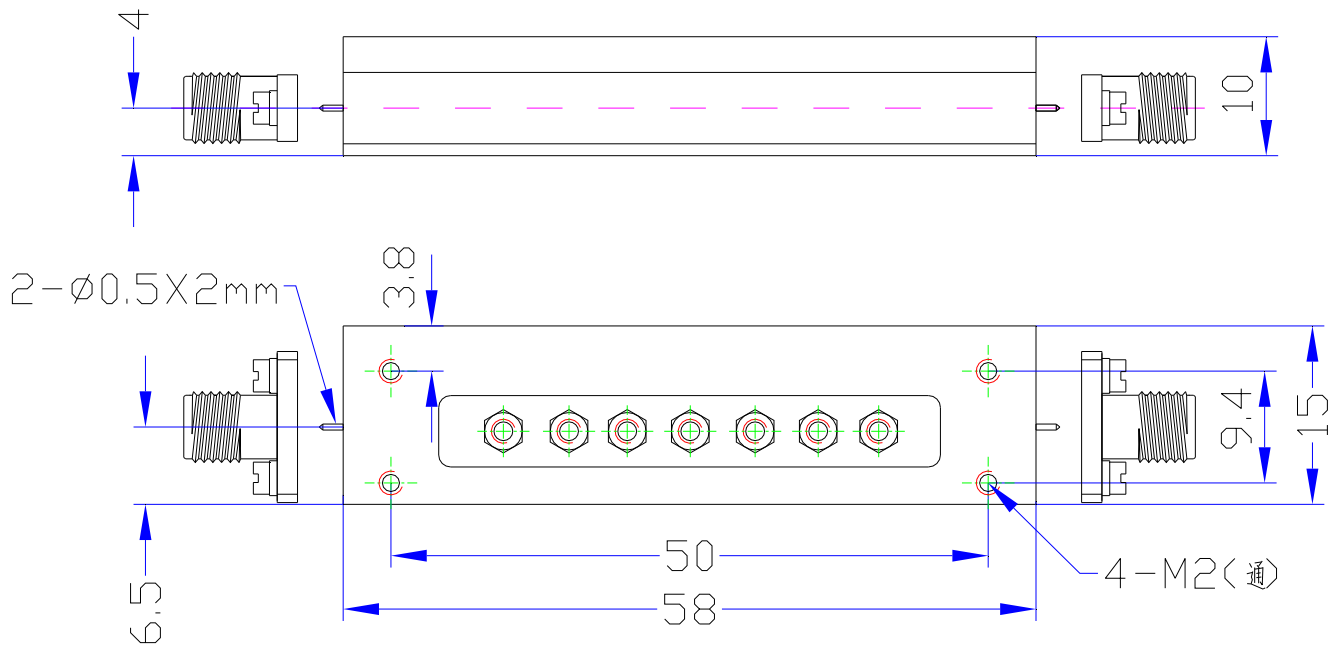

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041