


WT-A1016-Q03

腔体滤波器

技术指标

Serial	Parameters	
1	中心频率(Center Frequency)	16GHz
2	设计带宽(Design Bandwidth)	60MHz (15.97~16.03GHz)
3	插入损耗(Insertion Loss)	$\leq 1.5\text{dB @ } 16\text{GHz}$
4	驻波比(VSWR)	$\leq 1.5:1 @ 16\text{GHz}$
5	带外抑制(Rejection)	$\geq 70\text{dB @ } 12\text{GHz}$ $\geq 75\text{dB @ DC} \sim 8\text{GHz}$ $\geq 55\text{dB @ } 20\text{GHz}$
6	表面处理(Surface Finish)	镀银本色 (The Original Silver Color)
7	承受功率(Power)	5W
8	接口形式(Connectors)	$\phi 0.5 \times 2\text{mm}$ 针 SMA-Female (可拆卸)
9	外形结构图(Configuration)	As Below (Size Unit: mm)

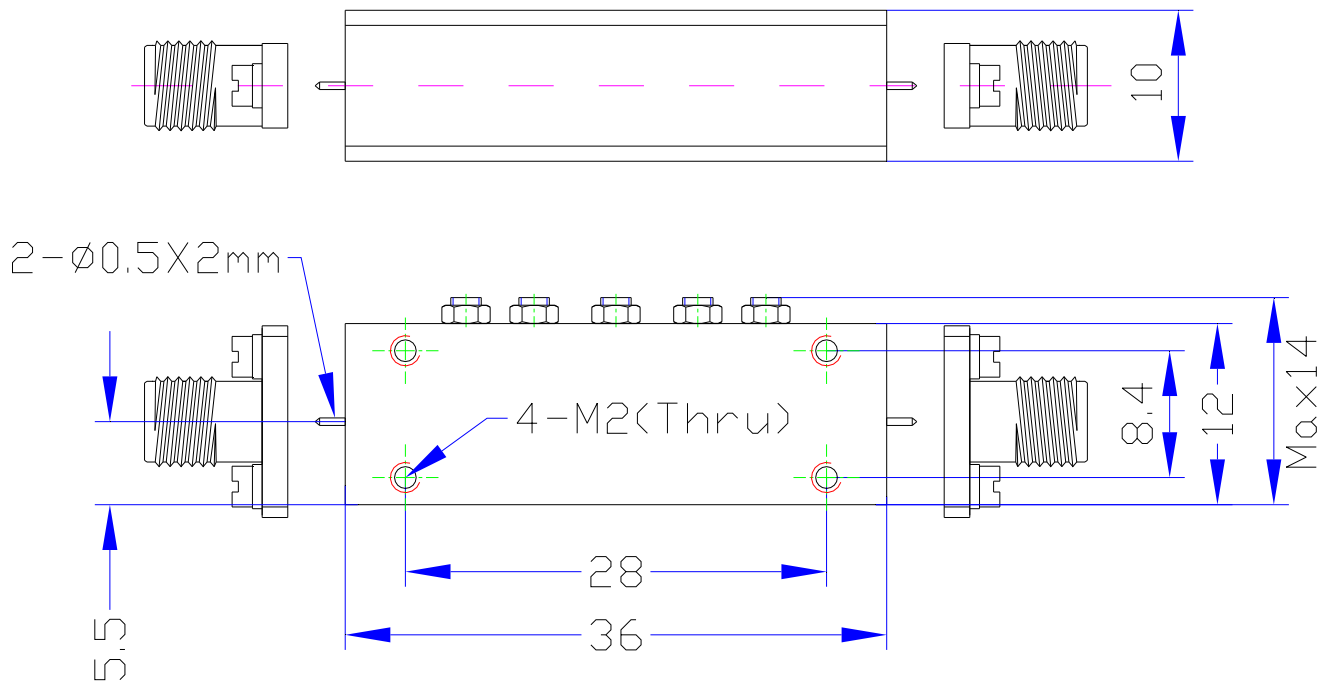

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL: +86-028-84300332 FAX: +86-028-84300332

地址: 中国 成都市高新区桂溪路 223 号 610041

Add: No.223, Guixi Road, Chengdu 610041, China Zip Code: 610041