


# WT-A10400-Q08

## Cavity Band Pass Filter

### Technical Data Sheet

S/N	Item	Parameters
1	Center Frequency(F0)	1350MHz
2	Pass Band Frequency	1348 ~ 1352MHz **
3	Pass Band Insertion Loss	≤3.5dB
4	Pass Band Ripple	≤1.0dB
5	Pass Band Return Loss	≥20dB
6	Stop Band Rejection	≥65dB @ DC ~ 1341MHz      ≥65dB @ 1359 ~ 5500MHz
7	Impedance	50 Ohms
8	Power Handling	10W Max.
9	Connectors	SMA-Female
10	Surface Finish	Painted Black
11	Temperature Range	0°C ~ +50°C
12	Material	Housing: 6061 Aluminum alloy      Resonant column: H59 Copper alloy Cover: LY12 Aluminum alloy      Connectors: Stainless Steel Tuning screw: H62 Copper alloy      Other screw: Stainless Steel
13	Dimensions	120*62*31mm
14	Net weight	0.367 KG

Outline Drawing: (Dimensions Unit: mm, Dimensions Tolerance: ±0.5mm)

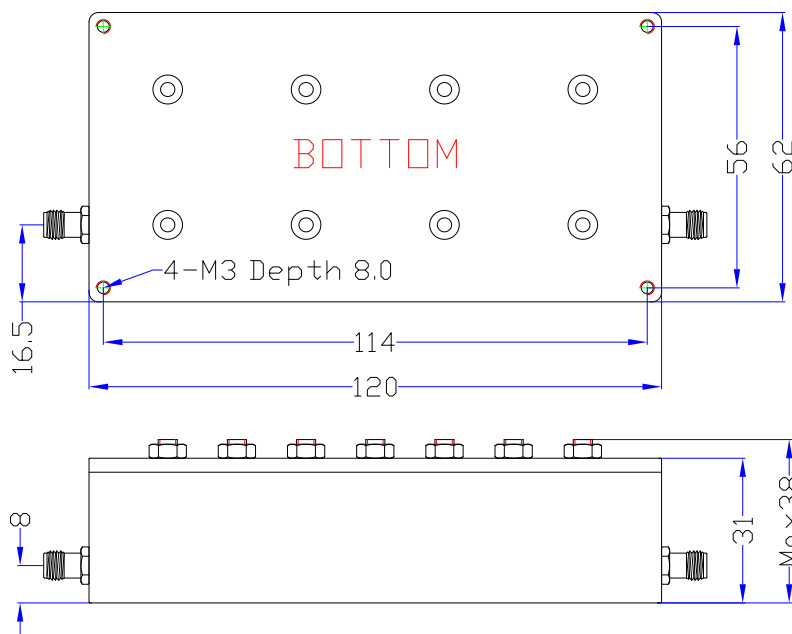

\*\* The actual design bandwidth will be greater than the Pass Band Frequency, and there is no bandwidth limit.