


WT-A1046-LX

螺旋滤波器

技术指标

Serial	Parameters	
1	Center Frequency(F0)	101MHz
2	Bandwidth	4MHz (99MHz~103MHz)
3	Insertion Loss	≤2.5dB
4	Ripple	≤1.0dB
5	VSWR	≤1.3:1
6	Rejection	≥40dB@DC~92MHz ≥40dB@110MHz~250MHz
7	Impedance	50 ohms
8	Power	5 W
9	Surface Finish	Black Paint
10	Connectors	SMA-Female
11	Configuration	As Below (Size Unit: mm)

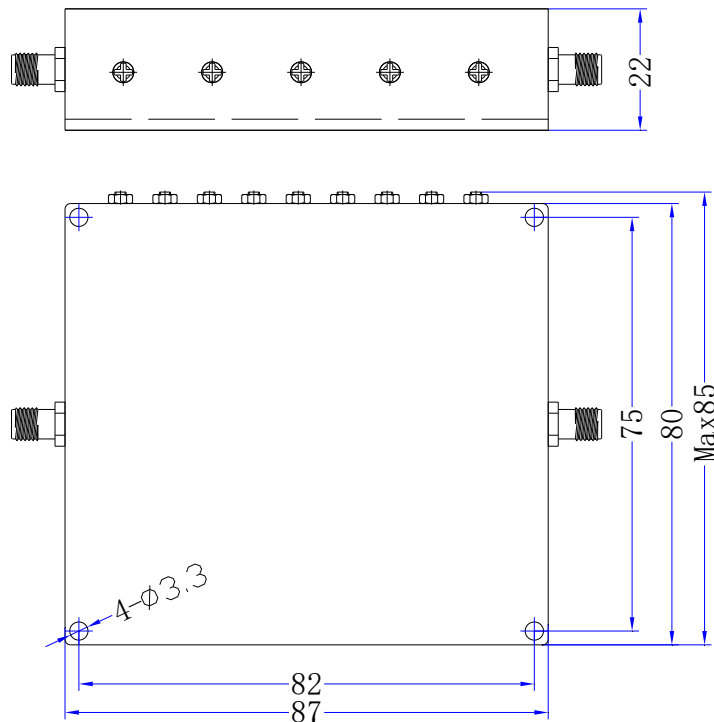

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041