


# WT-A1074-Q08

## Cavity Band Pass Filter

### Specifications

Serial	Parameters	
1	Pass Band Frequency	925~960MHz (F0=942.5MHz)
2	Insertion Loss	≤1.5dB
3	Ripple in Band	≤1.0dB
4	Return Loss	≥18dB
5	Rejection	≥70dB @ DC~790MHz ≥45dB @ 790~915MHz ≥45dB @ 995~1220MHz ≥70dB @ 1220~3000MHz
6	Impedance	50 ohms
7	Power	20 W
8	Surface Finish	Black Paint
9	Connectors	SMA-Female
10	Net Weight	TBD
11	Configuration	As Below (Size Unit: mm)

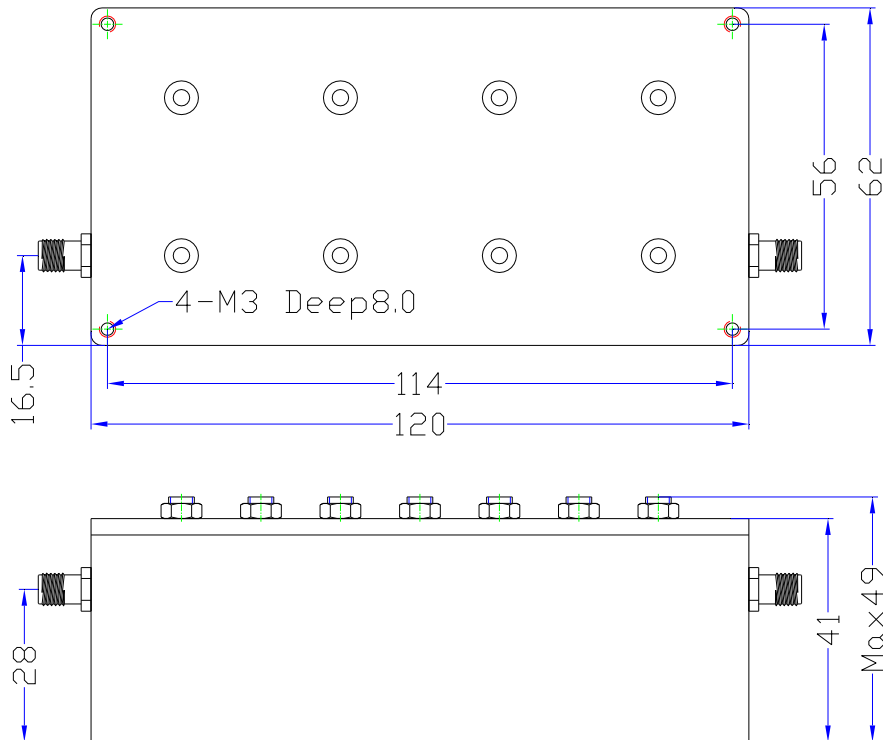

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051