


## WT-A1176-J09

### 交指滤波器

### 技术指标

Serial	Parameters	
1	1dB Pass Band Frequency	4.52~5.32GHz (F0=4.92GHz)
2	Insertion Loss	≤1.5dB
3	VSWR	≤1.5:1
4	Rejection	≥25dBc @ 4.29GHz ≥25dBc @ 5.55GHz ≥40dBc @ 5.7~6.92GHz
5	Port Connectors	SMA-Female
6	Impedance	50 ohms
7	Surface Finish	The Original Silver Color
8	Configuration	As Below (Size Unit: mm)

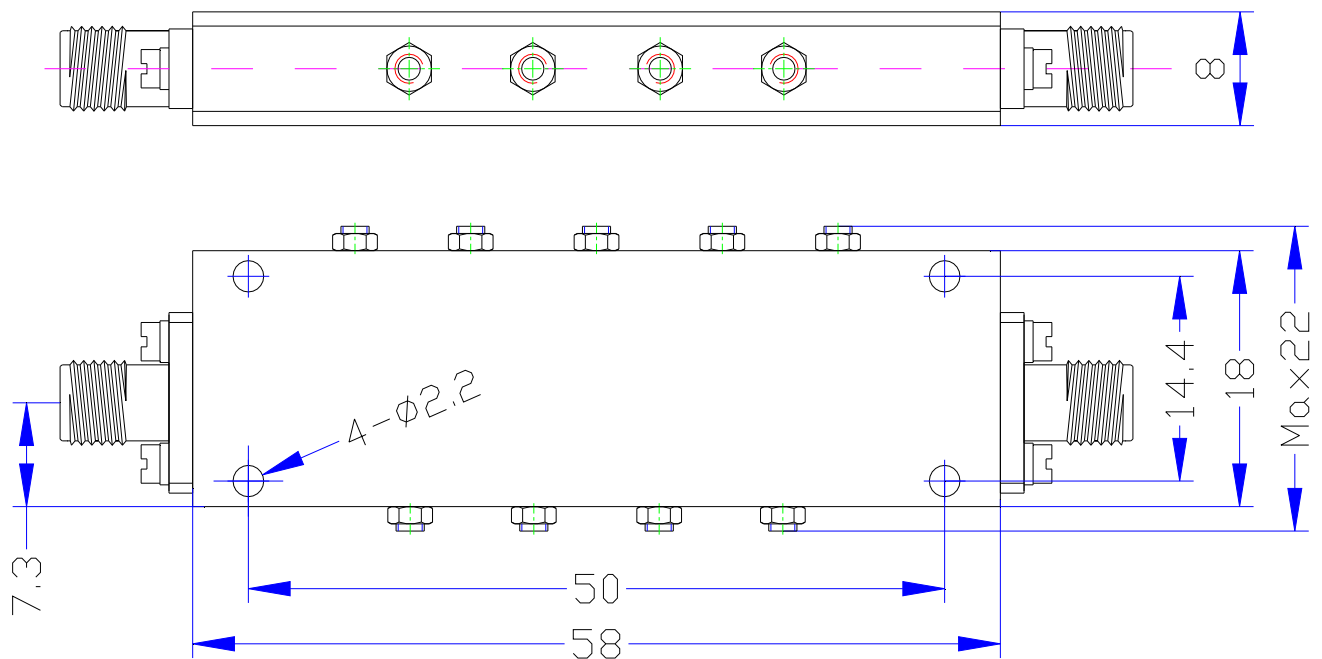

### 成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041