


WT-A1216-BS

Band Pass Filter

Specifications

Serial	Parameters	
1	Pass Band Frequency	2.0~10GHz
2	Insertion Loss	≤1.5dB
3	Ripple	≤1.5dB
4	VSWR	≤1.6:1
5	Rejection	≥60dB @ DC~1.4GHz ≥50dB @ 10.9~11.3GHz ≥55dB @ 11.3~15.4GHz ≥30dB @ 15.4~16.9GHz ≥55dB @ 16.9~19.5GHz
6	Power Handling	5W
7	Surface Finish	Guide Oxygen or Black Paint
8	Port Connectors	SMA-Female
9	Net Weight	0.04 KG
10	Configuration	As Below (Size Unit: mm)

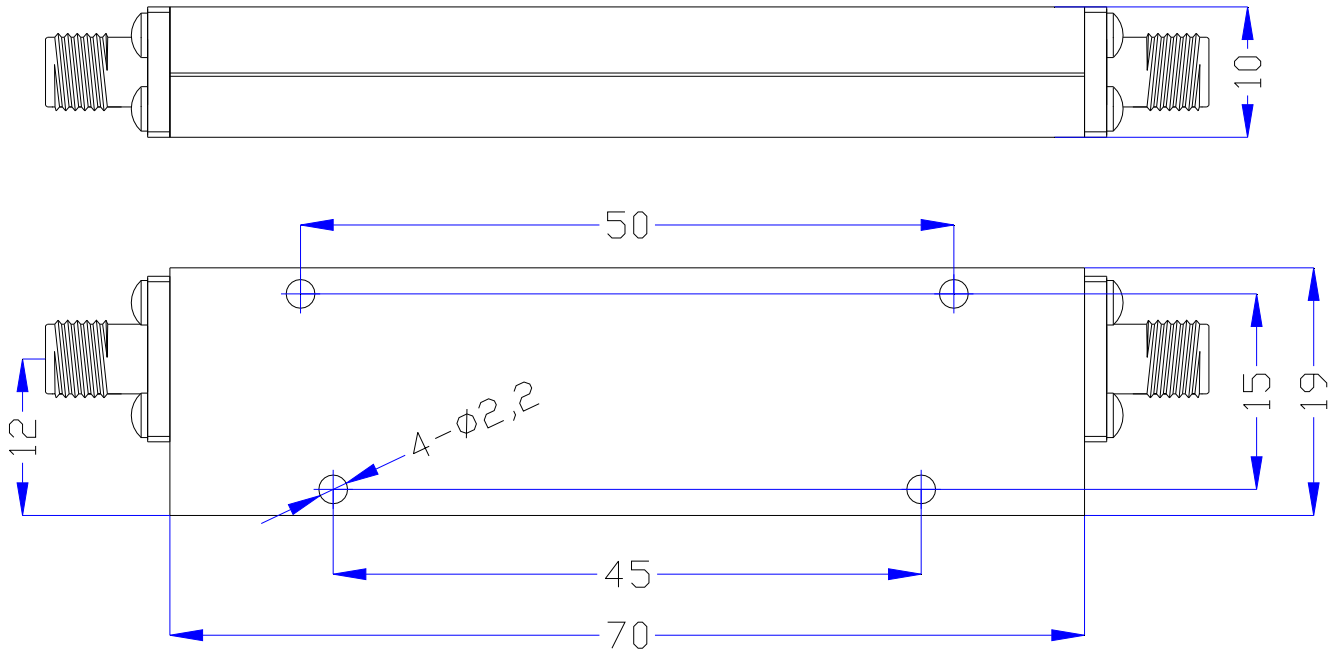

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051