


WT-A1260-Q05

腔体滤波器

技术指标

| Serial | Parameters | |
|--------|----------------------|--|
| 1 | Center Frequency(F0) | 4.89GHz |
| 2 | Bandwidth | 50MHz (4.865~4.915GHz) |
| 3 | Insertion Loss | ≤2.0dB |
| 4 | VSWR | ≤1.5:1 |
| 5 | Rejection | ≥50dB @ DC~4.69GHz ≥50dB @ 5.09~15GHz ≥40dB @ F0/2, 2*F0, 3*F0 (±1MHz) |
| 6 | Port Connectors | SMA-Female |
| 7 | Impedance | 50 ohms |
| 8 | Surface Finish | The Original Silver Color |
| 9 | Configuration | As Below (Size Unit: mm) |

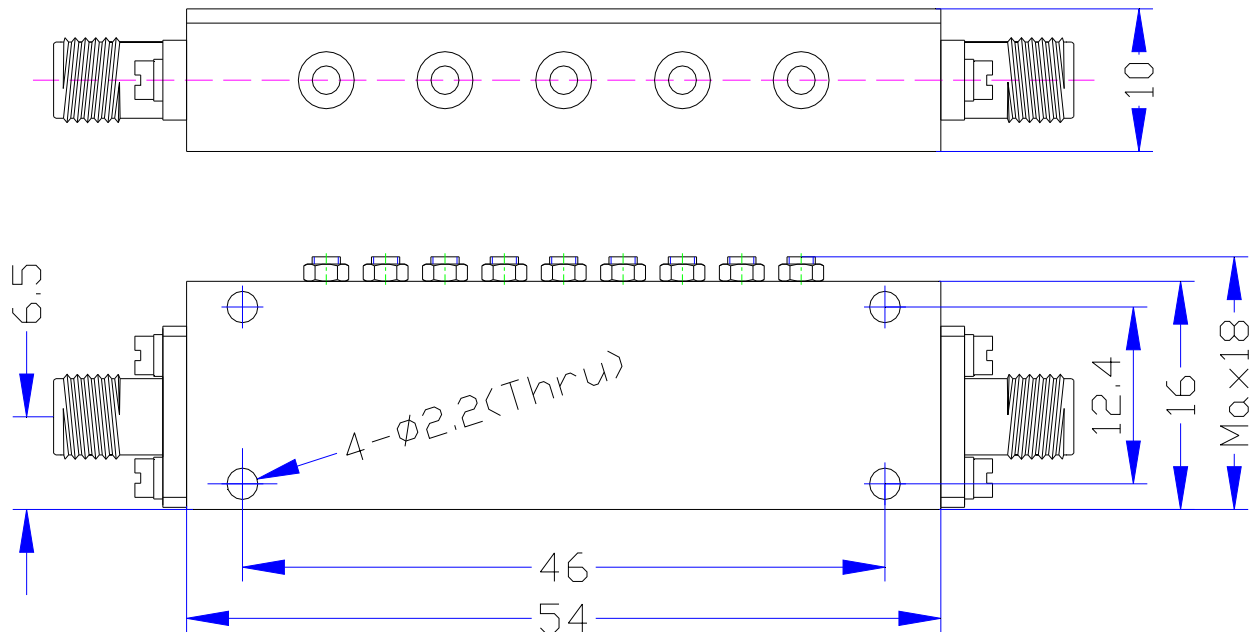

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd
<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com
 TEL:+86-028-84300332 FAX:+86-028-84300332
 地址:中国 成都市高新区桂溪路 223 号 610041
 Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041
 第4页 共4页