


WT-A1289-J09

交指滤波器

技术指标

Serial	Parameters	
1	工作频率(Operating Frequency)	5.9~7.1GHz (F0=6.5GHz)
2	插入损耗(Insertion Loss)	≤2.0dB
3	带内波动(Ripple in Band)	≤1.0dB
4	驻波比(VSWR)	≤1.8:1
5	带外抑制(Rejection)	≥30dBc @ DC~5.5GHz ≥30dBc @ 7.5~10GHz ≥65dBc @ 10~11GHz
6	表面处理(Surface Finish)	镀银本色 (The Original Silver Color)
7	承受功率(Power)	1W
8	接口形式(Connectors)	ø0.5*2mm针 SMA-Female (可拆卸)
9	外形结构图(Configuration)	As Below (Size Unit: mm)

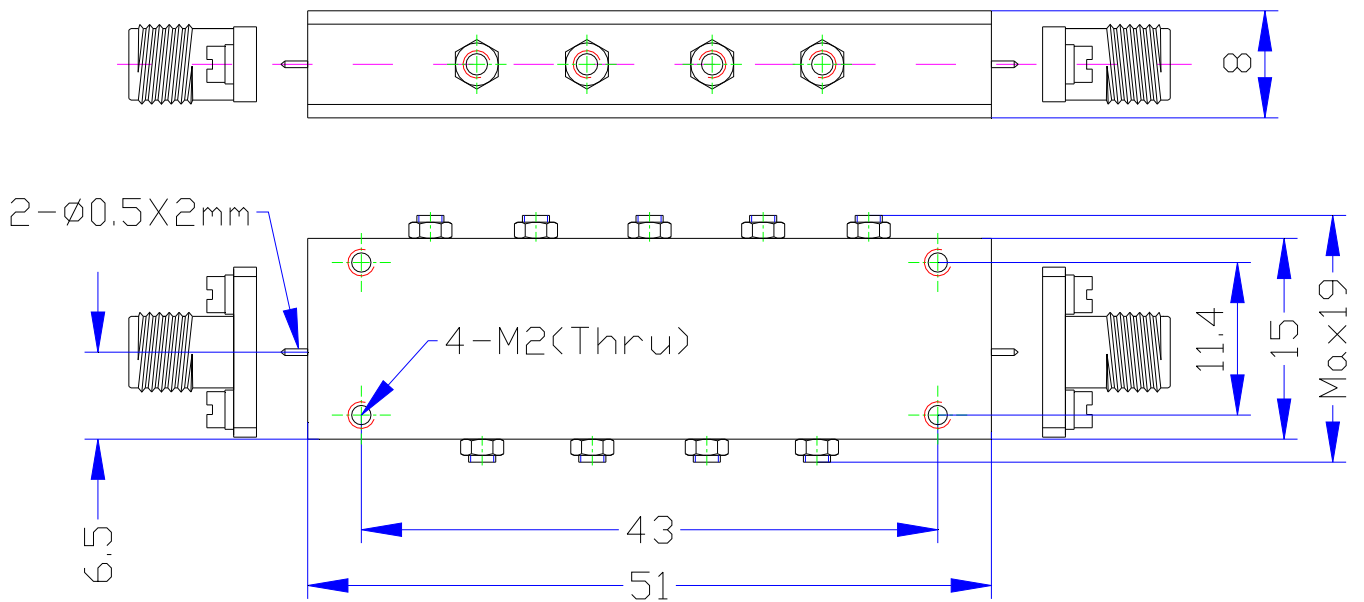

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041