


WT-A1651-HS

High Pass Filter

Specifications

Serial	Parameters	
1	Pass Band Frequency	3300~18000MHz
2	Pass Band Insertion Loss	≤1.0dB
3	Pass Band VSWR	≤1.7:1 (Type≤1.5:1)
4	Stop Band Attenuation	≥40dB @ DC~2700MHz
5	Impedance	50 ohms
6	Surface Finish	Guided Oxygen or Black Paint
7	Power Handling	≤10W
8	Connectors	SMA-Female
9	Net Weight	0.02 KG
10	Configuration	As Below (Size Unit: mm)

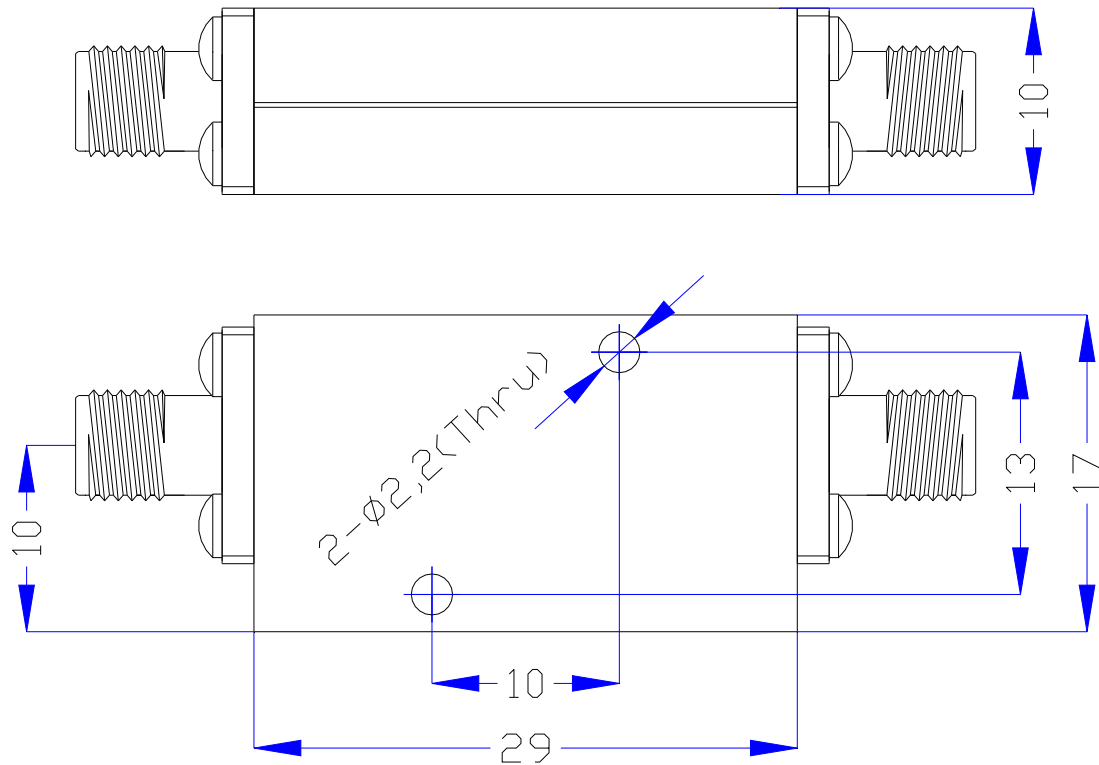

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051