


WT-A1696-HS

High Pass Filter

Specifications

| Serial | Parameters | |
|--------|---------------------|-------------------------------------|
| 1 | Pass Band Frequency | 1.2~11.5GHz |
| 2 | Insertion Loss | ≤1.5dB |
| 3 | VSWR | ≤1.5:1 |
| 4 | Rejection | ≥35dB @ 1.0GHz ≥60dB @ DC~0.8GHz |
| 5 | Power | 5W |
| 6 | Impedance | 50 ohms |
| 7 | Surface Finish | Guide Oxygen or Black Paint |
| 8 | Port Connectors | SMA-Female |
| 9 | Net Weight | 0.04 KG |
| 10 | Configuration | As Below (Size Unit: mm) |

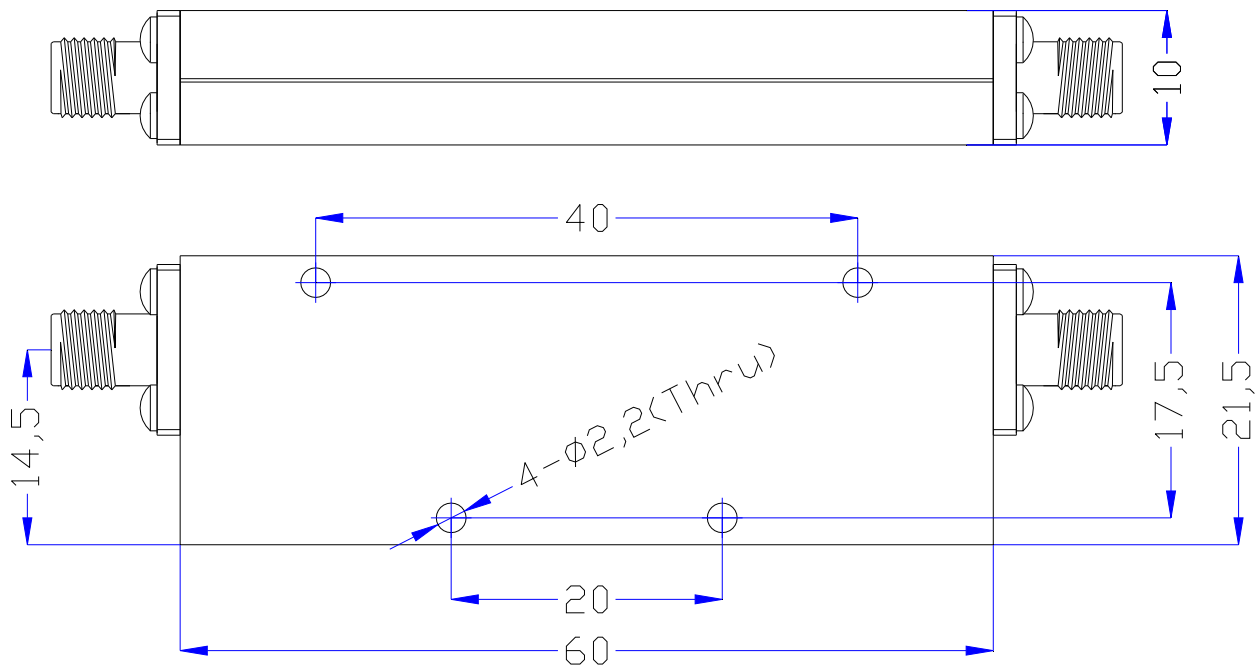

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051