


WT-A2659-Q08

腔体带通滤波器

技术指标

Serial	Parameters	
1	中心频率(Center Frequency)[F0]	1900MHz
2	通带频率(Pass Band Frequency)	1880~1920MHz
3	插入损耗(Insertion Loss)	≤1.7dB
4	带内波动(Ripple in Band)	≤1.0dB
5	驻波比(VSWR)	≤1.3:1
6	带外抑制(Rejection)	≥3.5dB @ Fc±5MHz (1875MHz、1925MHz)
		≥65dB @ Fc±20MHz (DC~1860MHz、1940~4000MHz)
7	阻抗(Impedance)	50 ohms
8	功率(Power)	≤50W
9	表面处理(Surface Finish)	黑色烤漆(Black Paint)
10	接口形式(Connectors)	SMA-Female
11	净重(Net Weight)	0.41 KG
12	外形结构图(Configuration)	As Below (Size Unit: mm)

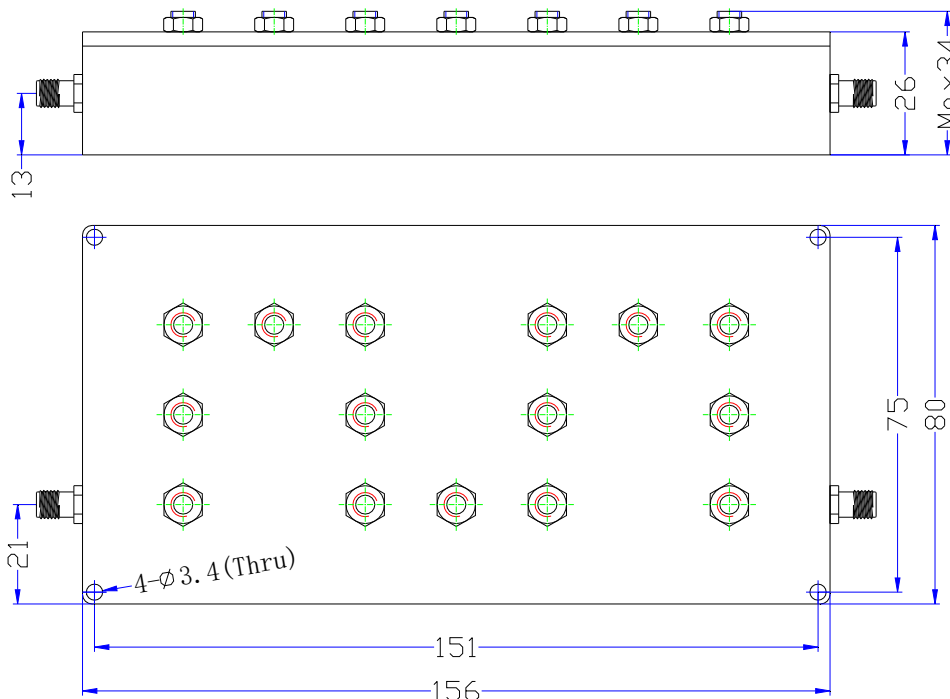

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332 FAX:+86-28-84300332-807

地址:中国 成都市成华区建材路 37 号 1-1108 610051

ADD: 11F-1108, Building#1, NO.37, Jiancai Road, Chengdu 610051, China. Zip Code:610051