


WT-A2864-J11

交指带通滤波器

技术指标

Serial	Parameters	
1	中心频率(Center Frequency)[F0]	3.1GHz
2	通带频率(Pass Band Frequency)	2.9~3.3GHz
3	插入损耗(Insertion Loss)	≤1.3dB
4	带内波动(Ripple in Band)	≤0.8dB
5	驻波比(VSWR)	≤1.5:1
6	带外抑制(Rejection)	≥50dB @ DC~2.6GHz ≥30dB @ DC~2.83GHz ≥50dB @ 3.6~5.0GHz
7	阻抗(Impedance)	50 ohms
8	功率(Power)	≤2W
9	表面处理(Surface Finish)	镀银本色或黑色烤漆 (The Original Silver Color or Black Paint)
10	接口形式(Connectors)	SMA-Female
11	净重(Net weight)	0.065 KG
12	外形结构图(Configuration)	As Below (Size Unit: mm)

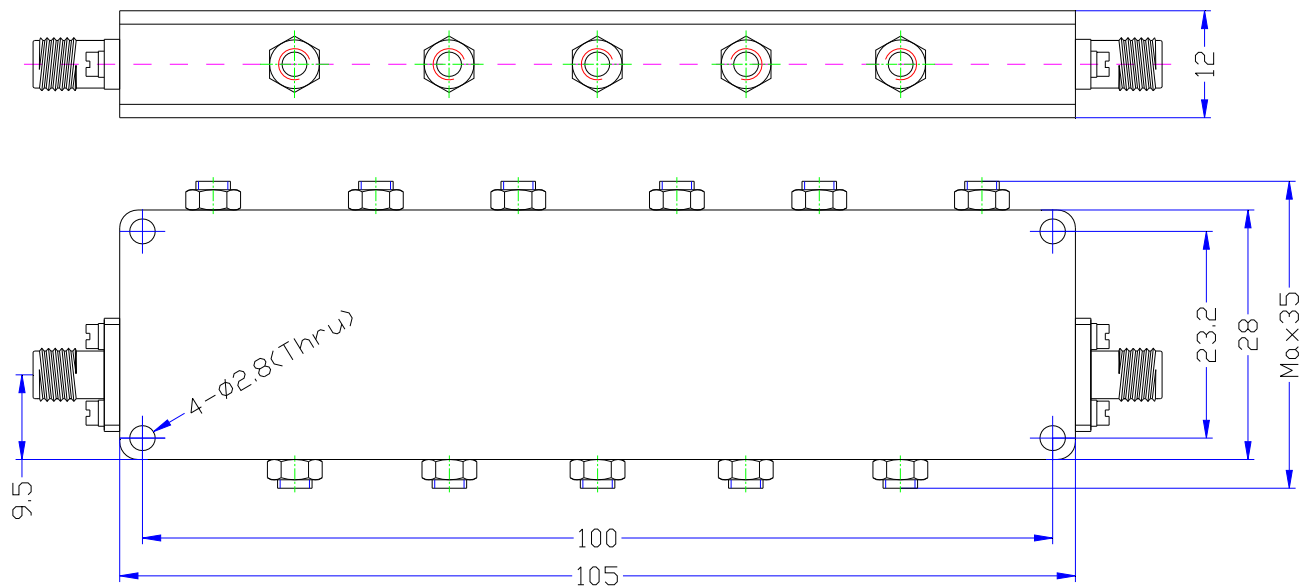

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332 FAX:+86-28-84300332-807

地址:中国 成都市成华区建材路 37 号 1-1108 610051

ADD: 11F-1108, Building#1, NO.37, Jiancai Road, Chengdu 610051, China. Zip Code:610051

第4页 共4页