


WT-A2906-J15

交指带通滤波器

技术指标

Serial	Parameters	
1	中心频率(Center Frequency)[F0]	7.0GHz
2	带宽(Bandwidth)	2.5GHz (5.75~8.25GHz)
3	插入损耗(Insertion Loss)	≤1.5dB
4	驻波比(VSWR)	≤1.5:1
5	带外抑制(Rejection)	≥45dB @ 4.125GHz ≥40dB @ 8.625GHz
6	表面处理(Surface Finish)	镀银本色 (The Original Silver Color)
7	阻抗(Impedance)	50 ohms
8	功率(Power)	2W
9	工作温度(Operating Temperature)	-40°C ~ +70°C
10	接口形式(Connectors)	ø0.5*2mm针 SMA-Female (可拆卸)
11	净重(Net Weight)	0.035 KG
12	外形结构图(Configuration)	As Below (Size Unit: mm)

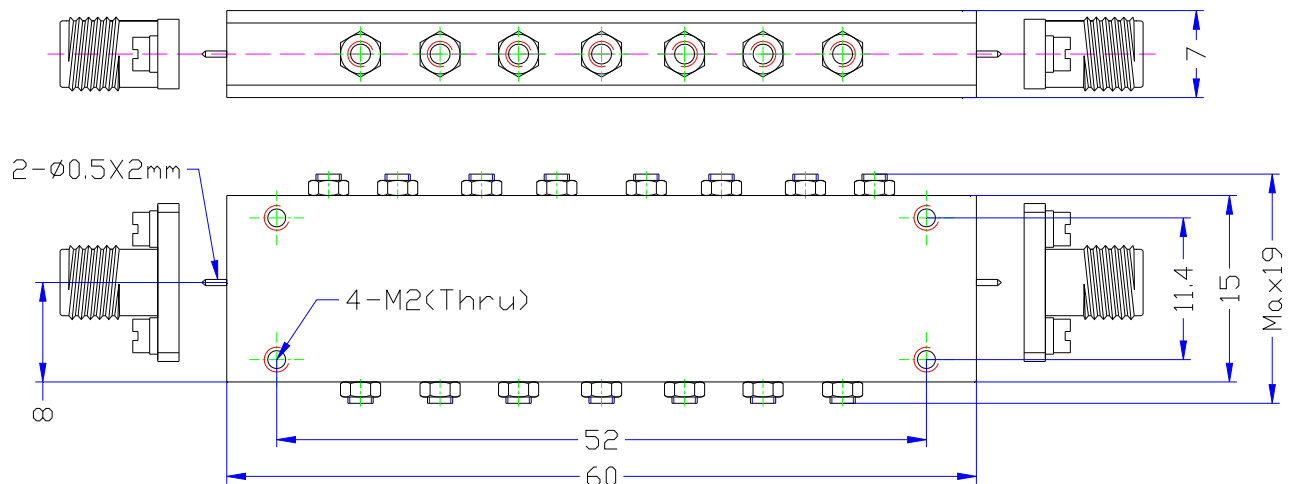

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332 FAX:+86-28-84300332-807

地址:中国 成都市成华区建材路 37 号 1-1108 610051

ADD: 11F-1108, Building#1, NO.37, Jiancai Road, Chengdu 610051, China. Zip Code:610051

第4页 共4页