


WT-A2907-J15

交指带通滤波器

技术指标

Serial	Parameters	
1	中心频率(Center Frequency)[F0]	9.0GHz
2	带宽(Bandwidth)	3.3GHz (7.35~10.65GHz)
3	插入损耗(Insertion Loss)	$\leq 1.5\text{dB}$
4	驻波比(VSWR)	$\leq 1.5:1$
5	带外抑制(Rejection)	$\geq 40\text{dB @ } 5.325\text{GHz}$ $\geq 30\text{dB @ } 11.025\text{GHz}$
6	表面处理(Surface Finish)	镀银本色 (The Original Silver Color)
7	阻抗(Impedance)	50 ohms
8	功率(Power)	2W
9	工作温度(Operating Temperature)	$-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$
10	接口形式(Connectors)	$\varnothing 0.5 \times 2\text{mm}$ 针 SMA-Female (可拆卸)
11	净重(Net Weight)	0.04 KG
12	外形结构图(Configuration)	As Below (Size Unit: mm)

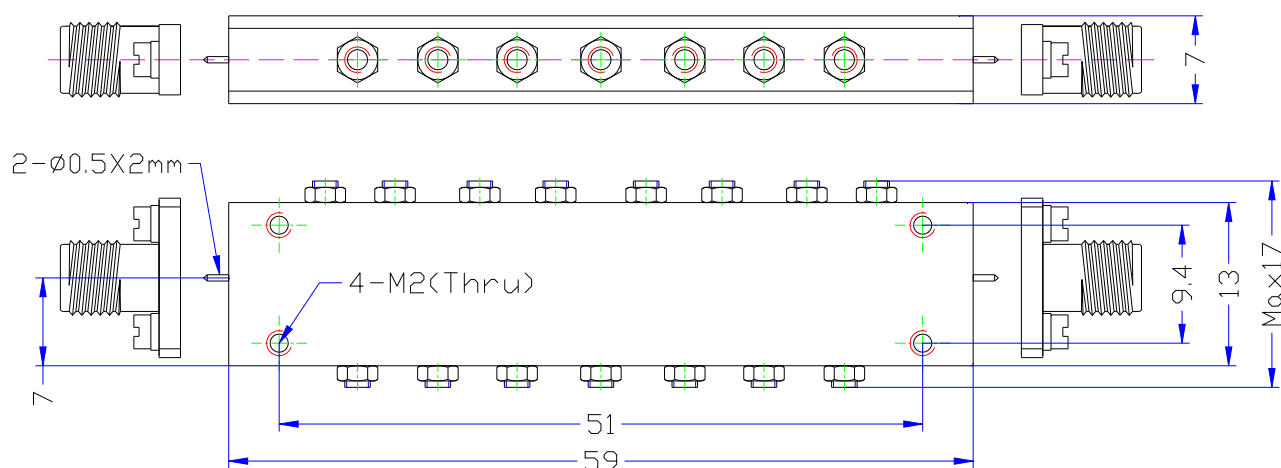

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332 FAX:+86-28-84300332-807

地址:中国 成都市成华区建材路 37 号 1-1108 610051

ADD: 11F-1108, Building#1, NO.37, Jiancai Road, Chengdu 610051, China. Zip Code:610051

第4页 共4页