


# WT-A2930-J15

## 交指带通滤波器

### 技术指标

Serial	Parameters	
1	中心频率(Center Frequency)[F0]	10.5GHz
2	工作频率(Operating Frequency)	8.8~12.2GHz
3	插入损耗(Insertion Loss)	$\leq 1.5\text{dB @ } 8.9\sim 12.1\text{GHz}$ $\leq 3.0\text{dB @ } 8.8\sim 8.9\text{GHz}$ $\leq 3.0\text{dB @ } 12.1\sim 12.2\text{GHz}$
4	驻波比(VSWR)	$\leq 1.5:1$
5	带外抑制(Rejection)	$\geq 70\text{dB @ } \text{DC}\sim 7.0\text{GHz}$ $\geq 70\text{dB @ } 13\sim 20\text{GHz}$
6	表面处理(Surface Finish)	镀银本色或黑色烤漆 (The Original Silver Color or Black Paint)
7	阻抗(Impedance)	50 ohms
8	功率(Power)	$\leq 5\text{W}$
9	接口形式(Connectors)	SMA-Female
10	工作温度(Operating Temperature)	$-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
11	净重(Net Weight)	0.035 KG
12	外形结构图(Configuration)	As Below (Size Unit: mm)

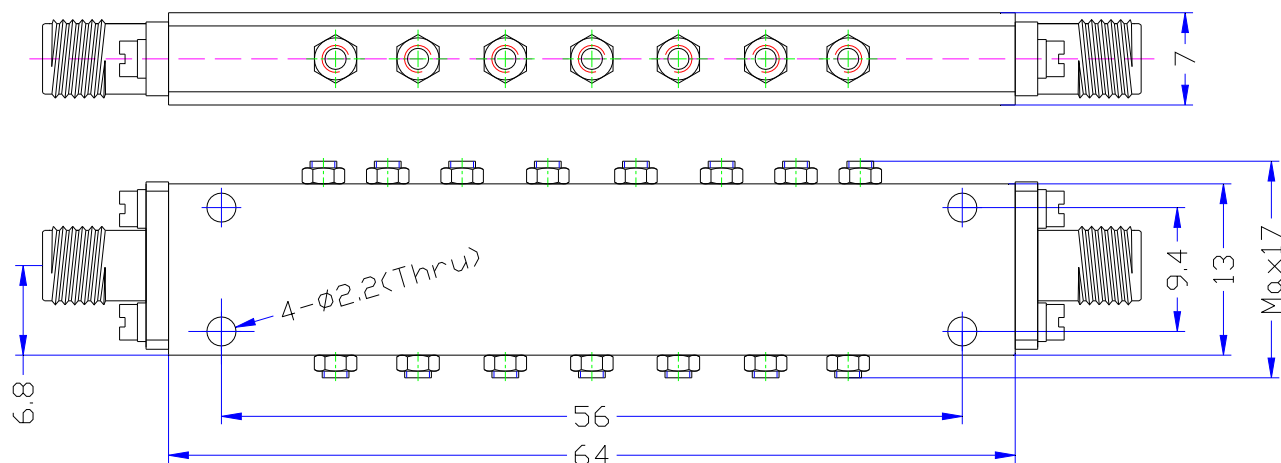

成都微通科技有限公司 WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: [tech@wtmicrowave.com](mailto:tech@wtmicrowave.com) [sales@wtmicrowave.com](mailto:sales@wtmicrowave.com)

<http://www.cdweitong.com> E-mail: [tech@cdweitong.com](mailto:tech@cdweitong.com) [sales@cdweitong.com](mailto:sales@cdweitong.com)

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

地址:中国 成都市成华区建材路 37 号 1-1108 610051